
DATA SHEET. Model: C-COR.

Individual charger for torches of the QR, LR, HR, LRX and HRX series.



Description

Individual charger to optimally charge the different battery technologies corresponding with the torches of the QR, LR, HR, LRX and HRX series.

Slow charging by means of two flying contact leads that provide steady current without electrical hazard. Design that maximizes ease of use, resistant and in accordance with the aesthetics of the torches.

Mounting of the charger on any surface by means of four screws and fixing of the torch on the charger through an additional part for mechanical fastening.

Technical characteristics

Power supply	230 V AC – 50 Hz 12 V DC
Type of plug	European (C, E, F) Cigarette-lighter
Usage temperature	From -10°C to 40°C
Electrical insulation	Class II
Weight	750 g
Protection rating	IP40 – IK08
Power input (charging)	2.8 W
Nominal current	133 mA (230 V AC) 200 mA (12 V DC)
Charging control	LED bicolor
Housing material	Black technical polymer
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Charging times


Ni-Cd or Ni-MH 1.6 o 2 Ah battery	36 h
Ni-Cd or Ni-MH 4 Ah battery	36 h
Li-Ion 2.6 Ah battery	24 h
Li-Ion 5.2 Ah battery	48 h

Charging signalling

Green	Connected to the mains
Red	Torch is charging (slow) and maintenance charging.

Dimensions

Standard mounting

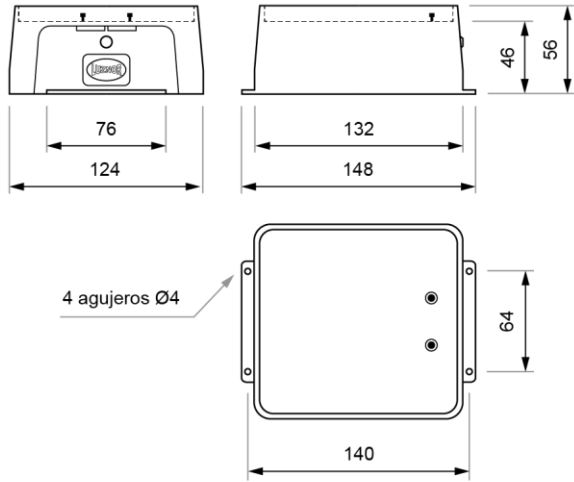

Mounting with mechanical fastening

