
DATA SHEET. Model: CM5-C64P.

Multiple charger for torches of the Series QR, LR, HR, LRX and HRX.



Description

Multiple charger (five units) to optimally charge the different battery technologies corresponding with the torches of the QR, LR, HR, LRX and HRX Series.

Slow charging by means of two flying contact leads that provide steadily current without electrical hazard. Design that maximizes ease of use, resistant and in accordance with the aesthetics of the torches.

Mounting of the charger on any surface by means of a metal plate with ten holes with a 6 mm diameter through an optional additional part for mechanical fastening.

Technical characteristics

Power supply	230 Vac – 50 Hz
Plug type	European (C, E, F)
Usage temperature	From -10°C to 40°C
Electrical insulation	Class II
Weight	5 kg
Protection rating	IP20 – IK08
Power input (charging)	14 W (5 x 2.8 W)
Nominal current	133 mA (230 Vac)
Charging control	5 x LED bicolor
Housing material	Black technical polymer
Applicable legislation	CE Marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU


Charging times

Ni-Cd or Ni-MH 1.6 or 2 Ah battery	36 h
Ni-Cd or Ni-MH 4 Ah battery	36 h
Li-Ion 2.6 Ah battery	24 h
Li-Ion 5.2 Ah battery	48 h

Charging signalling

Green	Connected to the mains
Red	Torch is charging (slow) and maintenance charging.

Dimensions

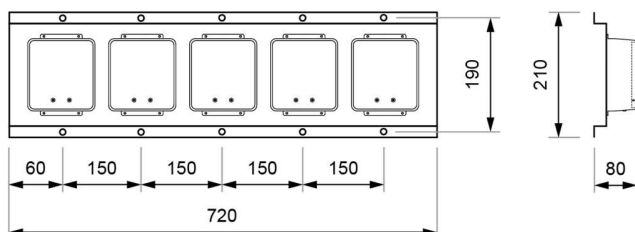

DATA SHEET. Model: CM5-C64P _ Rev. 00 (enero 2021)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

