

## DATA SHEET. Model: CM5-C64PQ.

Multiple charger for torches Series QR, LR, HR, LRX and HRX.



### Description

Multiple charger (five units) to optimally charge the different battery technologies corresponding with the torches of the QR, LR, HR, LRX and HRX Series.

Fast charging by means of two flying contact leads that provide steadily current without electrical hazard. Design that maximizes ease of use, resistant and in accordance with the aesthetics of the torches.

Mounting of the charger on any surface by means of a metal plate with ten holes with a 6 mm diameter and fixing of the torch on the charger through an additional part for mechanical fastening.

### Technical characteristics

Power supply	From 85 to 265 Vac – 50 Hz
Plug type	European (C, E, F)
Usage temperature	From -10°C to 40°C
Electrical insulation	Class II
Weight	5 kg
Protection rating	IP20 – IK08
Power input (charging)	fast < 35 W maintenance < 10 W
Nominal current	fast 500 mA maintenance 100 mA
Charging control	5 x LED tricolor
Housing material	Black technical polymer
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU


### Charging times

Ni-Cd or Ni-MH 1,6 or 2 Ah battery	5 h
Ni-Cd or Ni-MH 4 Ah battery	8 h
Li-Ion 2,6 Ah battery	5 h
Li-Ion 5,2 Ah battery	9 h

### Charging signalling

Green	Connected to the mains
Amber	Torch is charging fast
Red	Torch is maintenance charging

### Dimensions

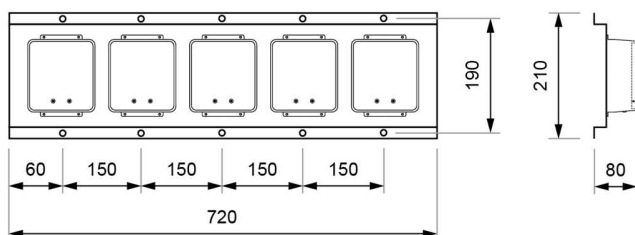

DATA SHEET. Model: CM5-C64PQ\_ Rev. 00 (enero 2021)



LUZNOR Desarrollos Electrónicos, S.L.  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

