

DATA SHEET. Model: CM5-C34Q.

Multiple charger for torches of the HS Series.



Description

Multiple charger (five units) to optimally charge any torch of the HS Series.
Fast charging by means of three contact leads that provide steadily current without electrical hazard.
Durable design that guarantees a strong fastening of the torch in accordance with the aesthetics.
Mounting of the charger on any surface through a metal fixation plate with six holes of 6 mm diameter.

Technical characteristics

Power supply	230 Vac – 50 Hz
Housing material	Black technical polymers
Plug type	European (C, E, F)
Usage temperature	From -10°C to 40°C
Electrical insulation	Class II
Weight	5 kg
Protection rating	IP20 – IK08
Power input (charging)	fast 60 W maintenance 10 W
Nominal current	fast 2 A maintenance 100 mA
Charging control	5 x LED green 5 x LED bicolor
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU


Charging times

Ni-MH 4,5 Ah battery	2,5 h
Ni-MH 9,5 Ah battery	5 h

Charging signalling

LED left:	
Green	Connected to the mains
LED right:	
Amber	Torch is charging fast.
Red	Torch is maintenance charging.

Dimensions

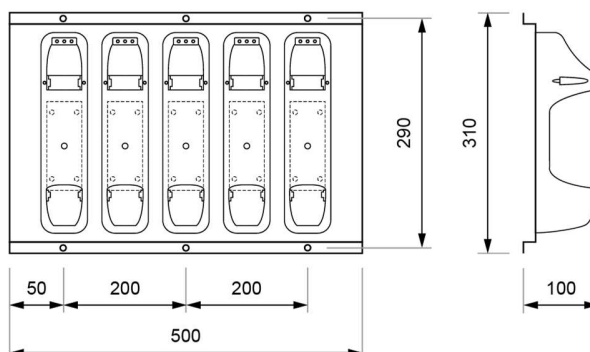

DATA SHEET. Model: CM5-34Q_ Rev. 00 (enero 2021)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

