

---

**DATA SHEET. Model: PL1-1800P.**

---

Self-contained emergency floodlight with maintained functioning of the PL Series.



---

**Description**

Emergency floodlight for surface mounting.

Hinged metal body with epoxy paint in white colour RAL 9010: the cover is supported at 90° with respect to the fixed base on the wall, allowing a comfortable handling of the interior.


Four LED spotlights with dispersed light beam and soft opal diffuser as standard, ideal for homogeneous from great height.

---

**Technical characteristics**

Lamp in emergency	4 x 9 x LED White
Lamp in maintained	4 x 9 x LED White
Flux in emergency	1.800 lm
Flux in maintained	1.800 lm
Colour temperature	5,700 K
Charge indicator	4 x LED green
Autonomy	1 h
Supply voltage	230 Vac - 50 Hz
Battery	4 x Ni-Cd (HT) 3.6 V 1.5 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP42 - IK04
Electrical insulation	Class I
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

---

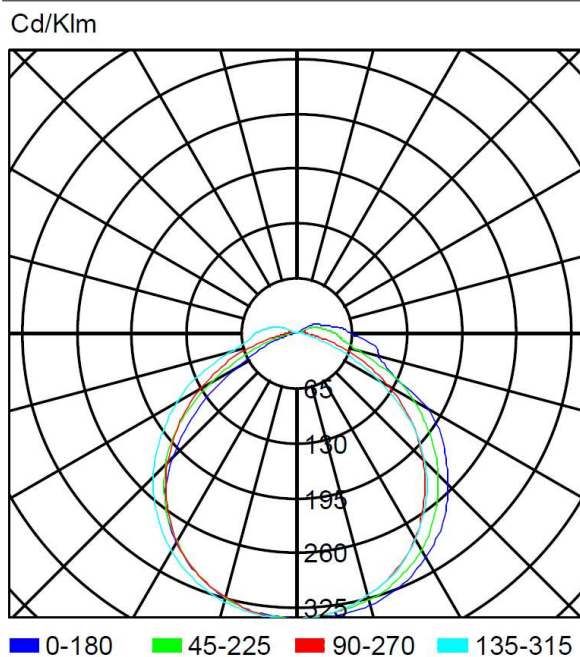**Photometric curve**

---

DATA SHEET. Model: PL1-1800P \_ Rev. 00 (enero 2021)




**LUZNOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com



## Dimensions

---

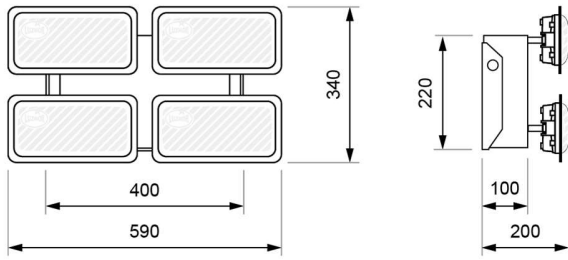

---

DATA SHEET. Model: PL1-1800P \_ Rev. 00 (enero 2021)



**LUZ NOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

