



## DATA SHEET. Model: K-730A.

Emergency convertor kit for fluorescent tubes of the K1 series.



### Description

Emergency convertor kit for fluorescent tubes consisting of a charger-converter and a battery.


Valid for linear and compact tubes with conventional or electronic ballast, but not for compact tubes with built-in starter (2 pins).

It allows maintained or non-maintained operation by means of external ballast depending on the connection.

### Technical characteristics

Battery	Ni-Cd (HT) 7.2 V - 3 Ah
Remote controllable	Yes (TL-300)
Autonomy	2 h
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

### Dimensions

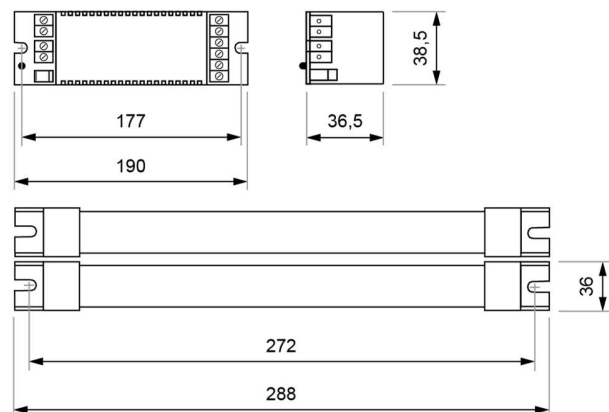

### Linear tubes T8

18 W	44%
36 W	22%
58 W	15%

### Compact tubes U (G24 and 2G11)

10 W G24Q-1	86%
13 W G24Q-1	66%
18 W G24-Q2	48%
26 W G24Q-3	33%
18 W 2G11	44%
24 W 2G11	36%
36 W 2G11	22%

DATA SHEET. Model: K-730A \_ Rev. 00 (enero 2021)



LUZNOR Desarrollos Electrónicos, S.L.  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

