


DATA SHEET. Model: MB-150P-3.

Self-contained emergency luminaire with maintained functioning of the Polar Series.

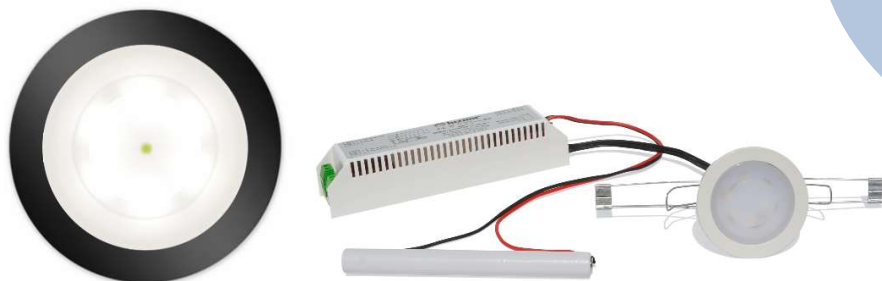


Description

Self-contained emergency luminaire for flush mounting.
Composed of three modules: luminaire, kit and battery.
Illumination through LED crown (possibility of warm temperature colour: 3,000 K).
Minimalist design with transparent, soft opal (-8%) or strong opal (-30%) diffuser.

Technical characteristics


Lamp in emergency	6 x LED white 5,700 K
Lamp in maintained	6 x LED white 5,700 K
Flux in emergency	150 lm
Flux in maintained	150 lm
Charge indicator LED	1 x LED green
Autonomy	3 h
Supply voltage	230 Vac - 50 Hz
Operation temperature	0 ÷ 40°C
Mains power	3.7 W
Battery	Ni-Cd (HT) 3.6 V – 1.5 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP42 - IK08 (IP55 possible)
Electrical insulation	Class II
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Photometric curve

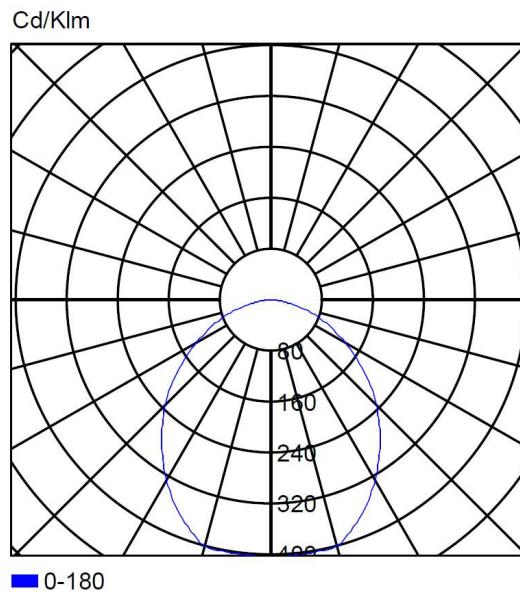

Dimensions

Flush mounting

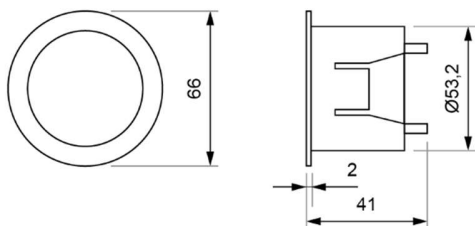

DATA SHEET. Model: MB-150P-3 _ Rev. 01 (March 2024)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

