

## DATA SHEET. Model: K-730T80.

Emergency convertor kit for fluorescent tubes of the K1 series.



### Description

Emergency convertor kit for fluorescent tubes consisting of a charger-converter and a battery.

Valid for linear and compact tubes with conventional or electronic ballast, but not for compact tubes with built-in starter (2 pins).

It allows maintained or non-maintained operation by means of external ballast depending on the connection.


### Technical characteristics

Battery	Ni-Cd (HT) 7.2 V - 3 Ah
Remote controllable	Yes (TL-300)
Autonomy	1 h
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

### Linear tubes T5

80 W	22%
------	-----

### Dimensions

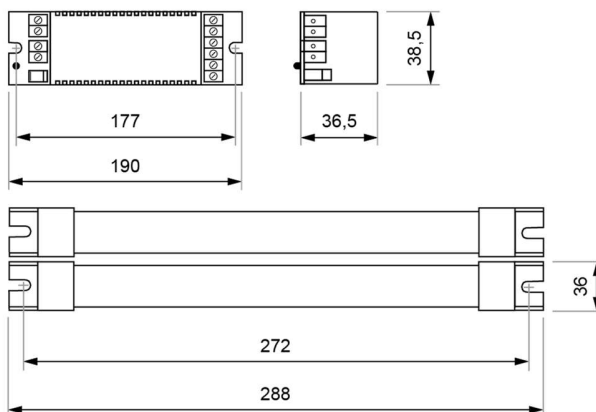

DATA SHEET. Model: K-730T80 \_ Rev. 00 (enero 2021)



LUZNOR Desarrollos Electrónicos, S.L.

Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

