

## DATA SHEET. Model: MB-200L (24Vdc).

Centralizable Luminaire (without emergency light) of the Polar series.



### Description

Centralizable luminaire for flush mounting.

Composed by two modules: luminaire and kit.

Illumination by means of LED crown (possibility of warm temperature colour: 3,000 K).

Minimalist design with transparent, soft opal (-8%) or strong opal (-30%) diffuser.

### Technical characteristics


Lamp in emergency	N/A
Lamp in maintained	6 x LED White 5,700 K
Flux in emergency	N/A
Flux in maintained	200 lm (or 100 lm)
Charge indicator LED	N/A
Autonomía	N/A
Supply voltage	24 Vdc
Operation temperature	0 ÷ 40°C
Mains power	2 W (or 1 W)
Battery	N/A
Remote controllable	N/A
Protection rating	IP42 - IK08 (IP55 possible)
Electrical insulation	Class II
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

### Photometric curve

N/A

### Dimensions

Flush mounting

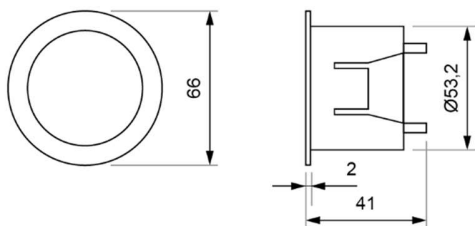

DATA SHEET. Model: MB-200L (24Vdc) \_ Rev. 01 (March 2024)



LUZNOR Desarrollos Electrónicos, S.L.  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

