



## DATA SHEET. Model: TL-110P-2.

Self-contained emergency luminaire with maintained and non-maintained functioning mode of the Tabled Series.



### Description

Self-contained emergency luminaire for surface mounting, recessed mounting through a spring kit or flush mounting through a flushing frame.


Illumination by means of an extra-flat LED tablet which is adjustable in 7 different angles.

Breakthrough design with transparent, soft opal (-8%) or strong opal (-30%) diffuser.

### Technical characteristics

Lamp in emergency	21 x LED White 5,700 K
Lamp in maintained	21 x LED White 5,700 K
Flux in emergency	118 lm
Flux in maintained	84 lm
Charge indicator LED	1 x LED green
Autonomy	2 h
Supply voltage	230 Vac - 50 Hz
Operation temperature	0 ÷ 40°C
Mains power maintained	3.6 W
Mains power emergency	2.0 W
Battery	Ni-Cd (HT) 2.4 V – 1.5 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP44 - IK04
Electrical insulation	Class II
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

### Photometric curve

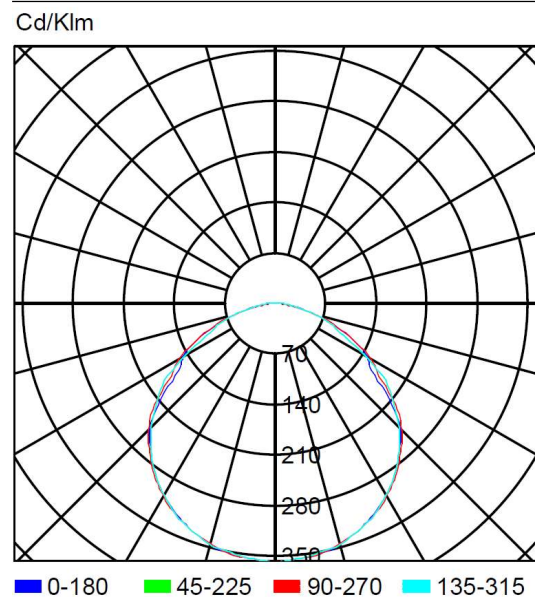

DATA SHEET. Model: TL-110P-2 \_ Rev. 01 (March 2024)





LUZNOR Desarrollos Electrónicos, S.L.  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com





## Dimensions



### Surface mounting

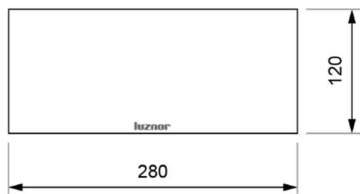

### Recessed mounting (cut: 260 x 90 mm)

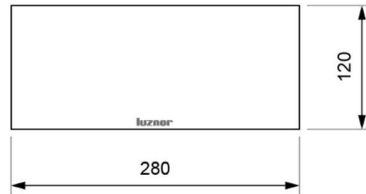

### Flush mounting (cut: 292 x 130 mm)

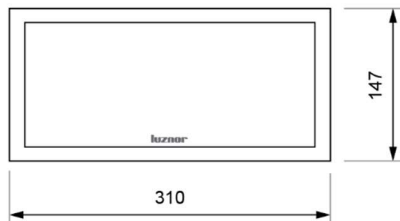

## Orientation capacity

Unique performance on the market due to the ability to direct the light beam at 7 angles (0° - 15° - 30° - 45° - 60° - 75° - 90°) as long as the emergency luminaire is not recessed or flushed.



DATA SHEET. Model: TL-110P-2 \_ Rev. 01 (March 2024)



**LUZNOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

