



DATA SHEET. Model: K-730.

Emergency convertor kit for fluorescent tubes of the K1 series.



Description

Emergency convertor kit for fluorescent tubes consisting of a charger-converter and a battery.


Valid for linear and compact tubes with conventional or electronic ballast, but not for compact tubes with built-in starter (2 pins).

It allows maintained or non-maintained operation by means of external ballast depending on the connection.

Technical characteristics

Battery	Ni-Cd (HT) 7.2 V - 3 Ah
Remote controllable	Yes (TL-300)
Autonomy	1 h
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Dimensions

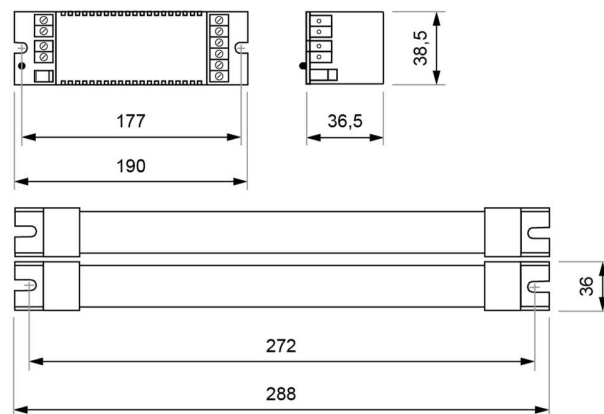

Linear tubes T8

18 W	88%
36 W	44%
58 W	30%

Compact tubes U (G24 and 2G11)

10 W G24Q-1	100%
13 W G24Q-1	100%
18 W G24-Q2	96%
26 W G24Q-3	66%
18 W 2G11	88%
24 W 2G11	72%
36 W 2G11	44%

DATA SHEET. Model: K-730 _ Rev. 00 (enero 2021)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

