

DATA SHEET. Model: K-715T.

Emergency convertor kit for fluorescent tubes of the K1 series.



Description

Emergency convertor kit for fluorescent tubes consisting of a charger-converter and a battery.


Valid for linear and compact tubes with conventional or electronic ballast, but not for compact tubes with built-in starter (2 pins).

It allows maintained or non-maintained operation by means of external ballast depending on the connection.

Technical characteristics

Battery	Ni-Cd (HT) 7.2 V – 1.5 Ah
Remote controllable	Yes (TL-300)
Autonomy	1 h
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Dimensions

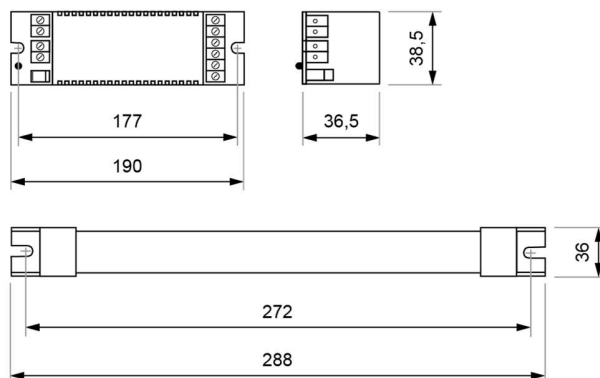

Linear tubes T5

14 W	58%
21 W	45%
28 W	33%
35 W	29%
49 W	18%
54 W	16%

DATA SHEET. Model: K-715T _ Rev. 00 (enero 2021)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

