


---

**DATA SHEET. Model: LL-190P-3.**

---

Self-contained emergency luminaire with non-maintained functioning of the L Led Series.

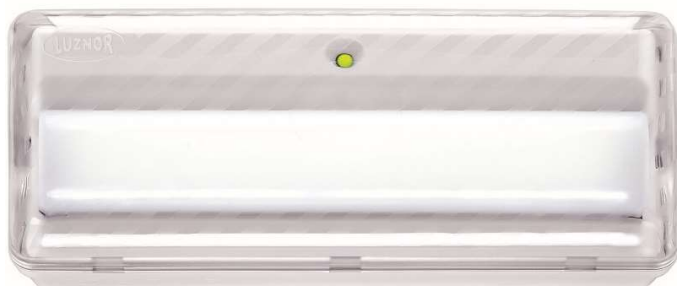

---

**Description**

---

Self-contained emergency luminaire for surface mounting, recessed mounting by means of a recessing frame, flush mounting by means of a flushing box or watertight mounting through a watertight box. Illumination through LED strip with transparent, soft opal (-8%) or strong opal (-30%) internal diffuser. Timeless and resistant design with transparent, soft opal (-8%) or strong opal (-30%) external diffuser.

---

**Technical characteristics**


---

Lamp in emergency	40 x LED White 5,700 K
Lamp in maintained	40 x LED White 5,700 K
Flux in emergency	196 lm
Flux in maintained	183 lm
Charge indicator LED	1 x LED green
Autonomy	3 h
Supply voltage	230 Vac - 50 Hz
Operation temperature	0 ÷ 40°C
Mains power maintained	5.1 W
Mains power non-maint.	3.0 W
Battery	Ni-Cd (HT) 6 V – 1.5 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP42 - IK04
Electrical insulation	Class II
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

---

**Photometric curve**

---

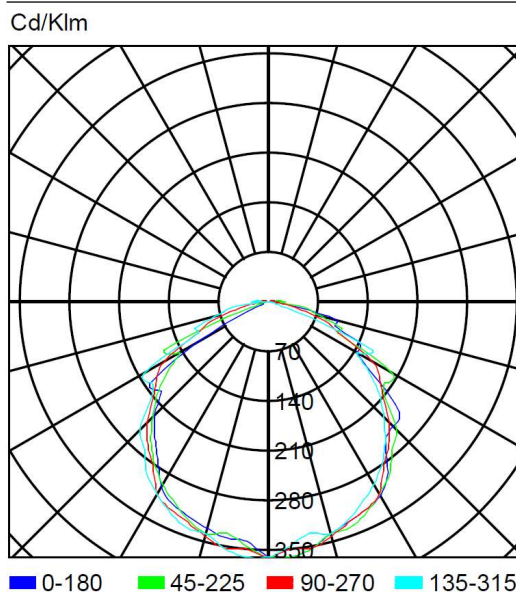

---

DATA SHEET. Model: LL-190P-3 \_ Rev. 01 (February 2024)



**LUZNOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com




## Dimensions


### Surface mounting




### Recessed mounting (cut: 265 x 120 mm)

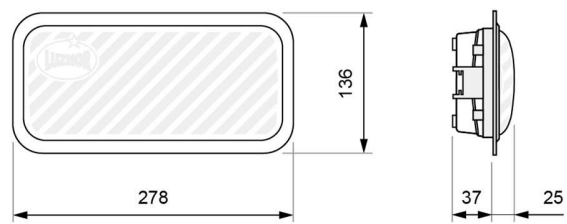

### Flush mounting (cut: 300 x 127 mm)

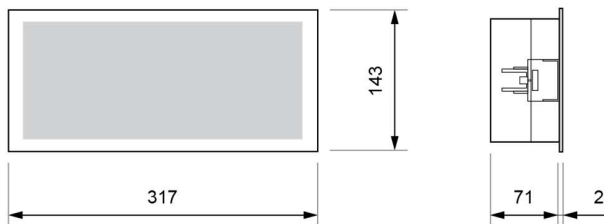

### Watertight mounting

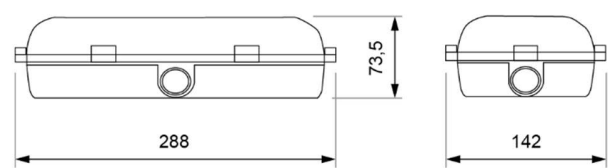

DATA SHEET. Model: LL-190P-3 \_ Rev. 01 (February 2024)



**LUZ NOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

