

## DATA SHEET. Model: LL-100B-2.

Self-contained emergency luminaire with maintained functioning of the L Basic Led Series.



### Description

Self-contained emergency luminaire for surface mounting, recessed mounting through recessing frame, flush mounting through flushing box or watertight mounting through watertight box.

Illumination by means of LED strip without internal diffuser.


Timeless and resistant design with transparent, soft opal (-8%) or strong opal (-30%) diffuser.

### Technical characteristics

Lamp in emergency	2 x LED White 5,700 K
Lamp in maintained	2 x LED White 5,700 K
Flux in emergency	100 lm
Flux in maintained	100 lm
Charge indicator LED	1 x LED green
Autonomy	2 h
Supply voltage	230 Vac - 50 Hz
Operation temperature	0 ÷ 40°C
Mains power	2.8 W
Battery	Ni-Cd (HT) 3.6 V – 0.7 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP42 - IK04
Electrical insulation	Class II
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

### Photometric curve

Cd/Klm

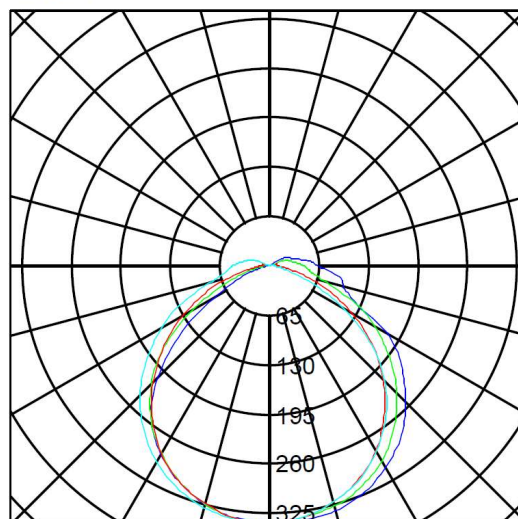


■ 0-180 ■ 45-225 ■ 90-270 ■ 135-315

### Dimensions

Surface mounting



Recessed mounting (cut: 265 x 120 mm)

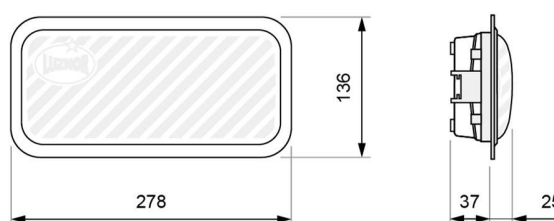

DATA SHEET. Model: LL-100B-2 \_ Rev. 01 (February 2024)




LUZNOR Desarrollos Electrónicos, S.L.

Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961


NIF: B01266451 · luznor@luznor.com · www.luznor.com



Flush mounting (cut: 300 x 127 mm)

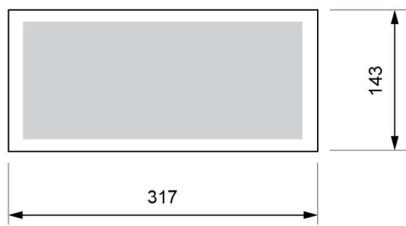

Watertight mounting

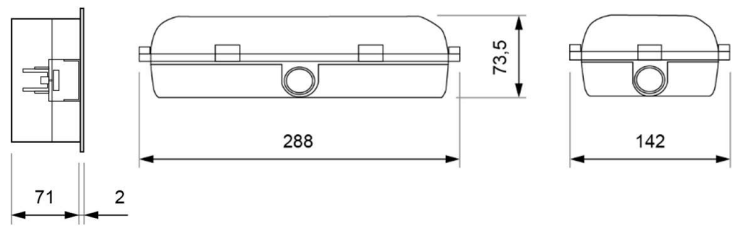

DATA SHEET. Model: LL-100B-2 \_ Rev. 01 (February 2024)



**LUZ NOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

