
DATA SHEET. Model: LLD-100B.

Self-contained emergency luminaire with maintained functioning of the LLD Series.




Description

Self-contained emergency luminaire for flush mounting in false ceiling or hollow wall. Series consisting of an emergency luminaire of the L Basic Led series and a flushing box. Illumination through LED strip without internal diffuser. Discreet, sharp-edged design with flat opal diffuser (luminous flux -25%).

Technical characteristics

| | |
|------------------------|---|
| Lamp in emergency | 2 x LED White 5,700 K |
| Lamp in maintained | 2 x LED White 5,700 K |
| Flux in emergency | 100 lm |
| Flux in maintained | 100 lm |
| Charge indicator | 1 x LED green |
| Autonomy | 1 h |
| Supply voltage | 230 Vac - 50 Hz |
| Operation temperature | 0 ÷ 40°C |
| Mains power | 2.8 W |
| Battery | Ni-Cd (HT) 3.6 V – 0.7 Ah |
| Remote controllable | Yes (TL-300) |
| Protection rating | IP42 - IK04 |
| Electrical insulation | Class II |
| Applicable legislation | CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU |

Photometric curve

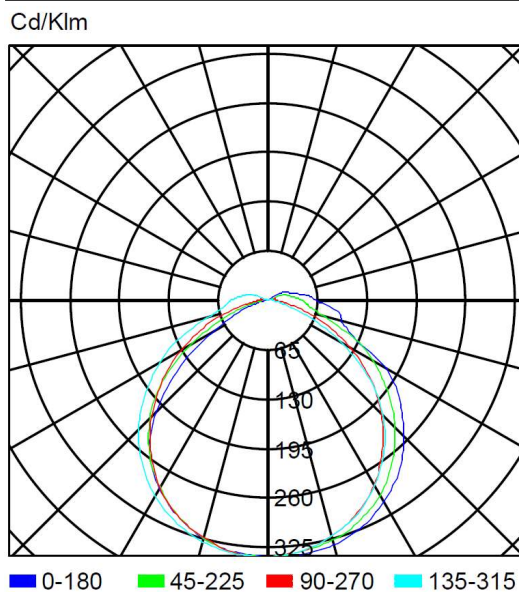

DATA SHEET. Model: LLD-100B _ Rev. 01 (February 2024)




LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

Flush mounting (cut: 300 x 127 mm)

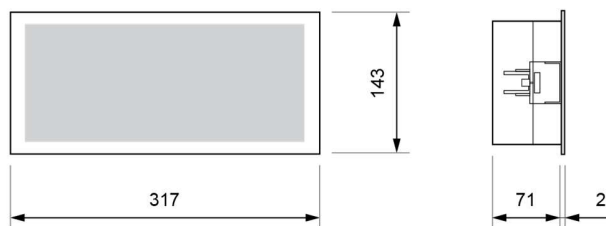

DATA SHEET. Model: LLD-100B _ Rev. 01 (February 2024)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

