

---

**DATA SHEET. Model: LLD-300B.**

---

Self-contained emergency luminaire with maintained functioning of the LLD Series.



---

**Description**

---

Self-contained emergency luminaire for flush mounting in false ceiling or hollow wall. Series consisting of an emergency luminaire of the L Basic Led series and a flushing box. Illumination through LED strip without internal diffuser. Discreet, sharp-edged design with flat opal diffuser (luminous flux -25%).

---

**Technical characteristics**


---

Lamp in emergency	6 x LED White 5,700 K
Lamp in maintained	6 x LED White 5,700 K
Flux in emergency	300 lm
Flux in maintained	300 lm
Charge indicator	1 x LED green
Autonomy	1 h
Supply voltage	230 Vac - 50 Hz
Operation temperature	0 ÷ 40°C
Mains power	5.9 W
Battery	Ni-Cd (HT) 3.6 V – 1.5 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP42 - IK04
Electrical insulation	Class II
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

---

**Photometric curve**

---

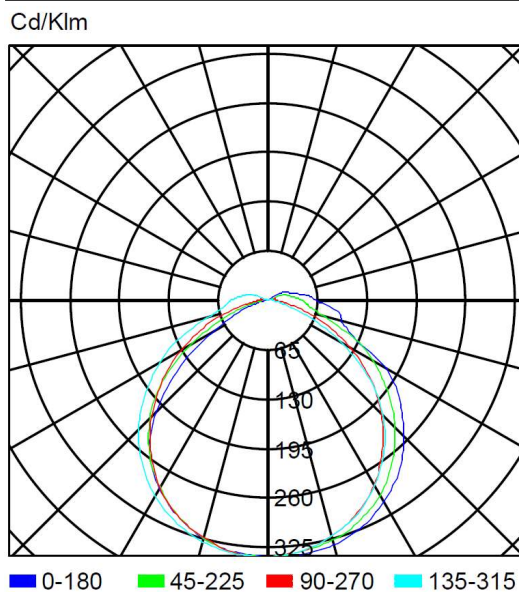

---

DATA SHEET. Model: LLD-300B \_ Rev. 01 (March 2024)




**LUZNOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com



## Dimensions

---

Flush mounting (cut: 300 x 127 mm)

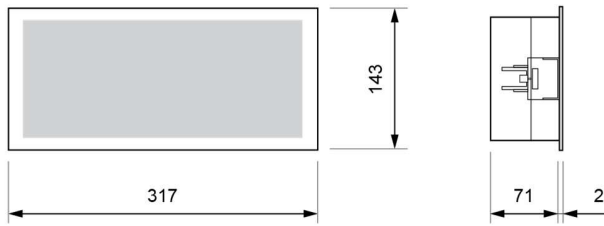

---

DATA SHEET. Model: LLD-300B \_ Rev. 01 (March 2024)



**LUZ NOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

