
DATA SHEET. Model: LLD-300L.

Centralizable luminaire (without emergency lighting) of the LLD Series.



Description

Centralizable luminaire for flush mounting in false ceiling or hollow wall.
Series consisting of an emergency luminaire of the L Basic Led series and a flushing box.
Illumination through LED strip without internal diffuser.
Discreet, sharp-edged design with flat opal diffuser (luminous flux -25%).

Technical characteristics

Lamp in emergency	N/A
Lamp in maintained	6 x LED White 5,700 K
Flux in emergency	N/A
Flux in maintained	300 lm
Charge indicator	N/A
Autonomy	N/A
Supply voltage	85 ÷ 265 Vac - 50 Hz 120 ÷ 370 Vdc
Operation temperature	0 ÷ 40°C
Mains power	3.3 W
Battery	N/A
Remote controllable	N/A
Protection rating	IP42 - IK04
Electrical insulation	Class II
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Photometric curve

N/A

DATA SHEET. Model: LLD-300L _ Rev. 01 (March 2024)




LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

Flush mounting (cut: 300 x 127 mm)

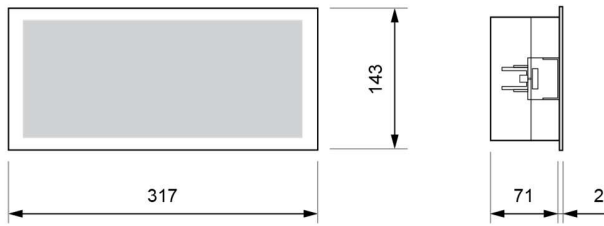

DATA SHEET. Model: LLD-300L _ Rev. 01 (March 2024)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

