

---

**DATA SHEET. Model: LLE-100B.**

---

Self-contained emergency lighting with maintained functioning of the LLE Series.



---

**Description**

---

Self-contained watertight emergency luminaire for surface mounting, recessed mounting through stainless steel recessing frame or suspended through orientation kit.

Serie formed by a luminaire of the L Basic series and a watertight box BE-L.

Illumination by means of LED strip (without internal diffuser) with standard transparent diffuser.

Resistant, high quality design, includes three cables entries for PG-13.5 cable glands and is supplied with two plugs.

---

**Technical characteristics**

---


Lamp in emergency	2 x LED White 5,700 K
Lamp in maintained	2 x LED White 5,700 K
Flux in emergency	100 lm
Flux in maintained	100 lm
Charge indicator	1 x LED green
Autonomy	1 h
Supply voltage	230 Vac - 50 Hz
Operation temperature	0 ÷ 40°C
Mains power	2.8 W
Battery	Ni-Cd (HT) 3.6 V – 0.7 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP67 - IK08
Electrical insulation	Class II
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

---

**Photometric curve**

---

Cd/Klm

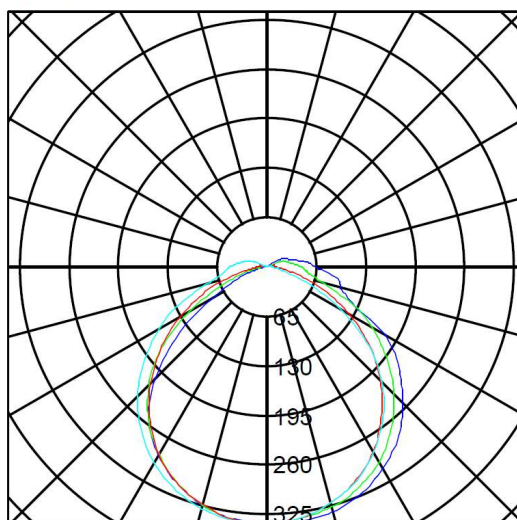

■ 0-180    ■ 45-225    ■ 90-270    ■ 135-315

---

DATA SHEET. Model: LLE-100B \_ Rev. 01 (March 2024)




**LUZNOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com



## Dimensions

Watertight mounting

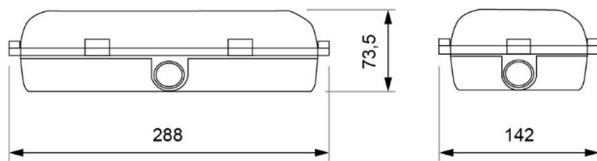

Recessed mounting (cut: 300 x 160 mm)



Swivel mounting



DATA SHEET. Model: LLE-100B \_ Rev. 01 (March 2024)



**LUZNOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

