
DATA SHEET. Model: LLE-450L.

Centralizable luminaire (without emergency lighting) of the LLE series.



Description

Watertight centralizable luminaire for surface mounting, recessed mounting through stainless steel recessing frame or suspended through orientation kit.

Serie formed by a luminaire of the L Basic series and a watertight box BE-L.

Illumination by means of LED strip (without internal diffuser) with standard transparent diffuser.

Resistant, high quality design, includes three cables entries for PG-13.5 cable glands and is supplied with two plugs.

Technical characteristics

| | |
|------------------------|---|
| Lamp in emergency | N/A |
| Lamp in maintained | 9 x LED White 5,700 K |
| Flux in emergency | N/A |
| Flux in maintained | 450 lm |
| Charge indicator | N/A |
| Autonomy | N/A |
| Supply voltage | 85 ÷ 265 Vac - 50 Hz 120 ÷ 370 Vdc |
| Operation temperature | 0 ÷ 40°C |
| Mains power | 4.9 W |
| Battery | N/A |
| Remote controllable | N/A |
| Protection rating | IP67 - IK08 |
| Electrical insulation | Class II |
| Applicable legislation | CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU |

Photometric curve

N/A

DATA SHEET. Model: LLE-450L _ Rev. 01 (March 2024)




LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

Watertight mounting

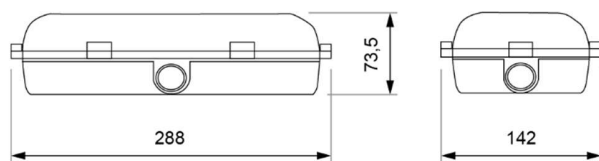

Recessed mounting (cut: 300 x 160 mm)



Swivel mounting



DATA SHEET. Model: LLE-450L _ Rev. 01 (March 2024)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

