

DATA SHEET. Model: Élite Centralized.

Centralized beacon light with maintained functioning of the Élite Series.



Description

Centralized circular beacon light for recessed mounting, ideal size for round or square universal box. Composed of a central white LED and diffuser available in different transparent colours, as well as in strong opal white (-30%).

Technical characteristics


Electrical insulation	Class III
Protection rating	IP42 or IP55, IK08
Operating temperature	0 ÷ 40 °C
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Centralizing device


Supply voltage	230 Vac - 50 Hz
Tension beacons	6 Vdc
Autonomy	1 h
Battery	Ni-Cd (HT)
Remote controllable	Yes (EPC-80)

Dimensions

Surface mounting

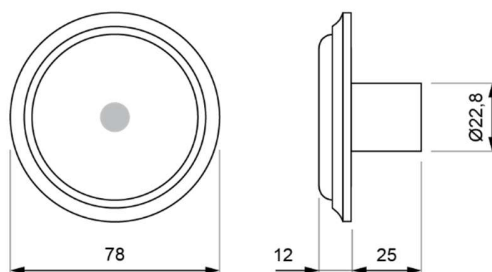

Flush mounting with frame

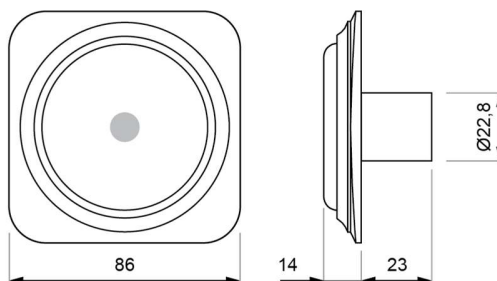


DATA SHEET. Model: Élite Centralized _ Rev. 01 (February 2024)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Installation scheme

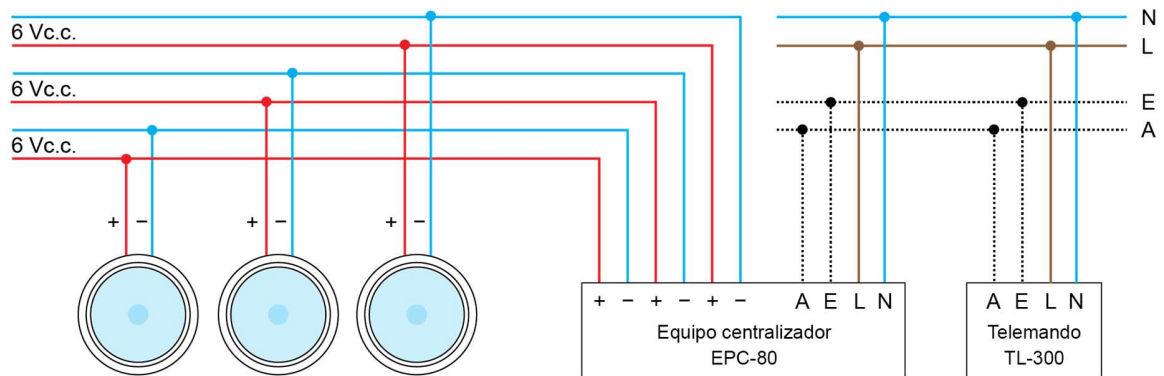

DATA SHEET. Model: Élite Centralized _ Rev. 01 (February 2024)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

