



DATA SHEET. Model: PCM Centralized.

Centralized beacon light with maintained functioning of the PCM Series.




Description

Small-sized centralized circular beacon light for flush mounting.
Composed of a central LED available in different colours.

Technical characteristics

Electrical insulation	Class III
Protection rating	IP67, IK08
Colours central LED	White, red, amber, blue and green
Operation temperature	0 ÷ 40°C
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Dimensions

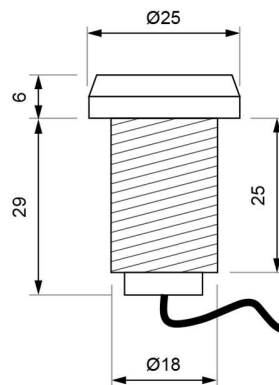

Centralizing device

Supply voltage	230 Vac - 50 Hz
Tension beacons	12 Vdc / Vac
Autonomy	1 h
Battery	Ni-Cd (HT)
Remote controllable	Yes

DATA SHEET. Model: PCM Centralized _ Rev. 01 (March 2024)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

