

DATA SHEET. Model: LN1-2400P2400.

Self-contained emergency light fitting with maintained functioning of the LN Series.




Description

Watertight self-contained emergency light fitting for surface mounting.
Illumination through LED strip with internal high transmittance soft opal diffuser.
Rectangular and modern design, slim and discreet with soft opal external diffuser.

Technical characteristics

Lamp in emergency	48 x LED White 5,700 K
Lamp in maintained	48 x LED White 5,700 K
Flux in emergency	2.400 lm
Flux in maintained	2.400 lm
Charge indicator	1 x LED green
Autonomy	1 h
Supply voltage	230 Vac - 50 Hz
Operation temperature	0 ÷ 40°C
Mains power	24.0 W
Battery	Ni-Cd (HT) 7.2 V - 4 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP65 - IK08
Electrical insulation	Class I
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Photometric curve

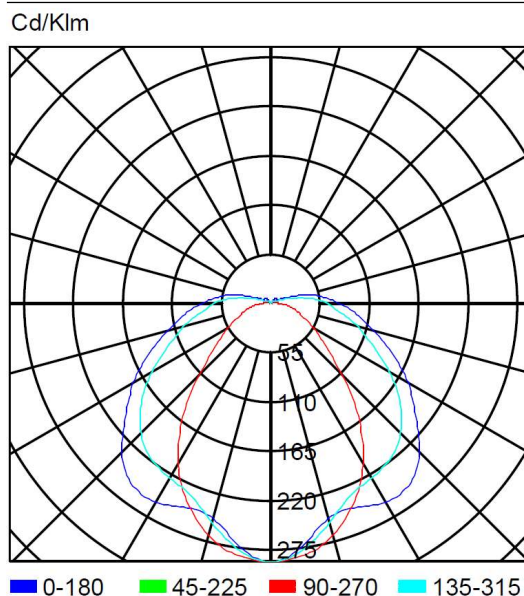

DATA SHEET. Model: LN1-2400P2400 _ Rev. 01 (March 2024)




LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

Surface mounting – Size 2

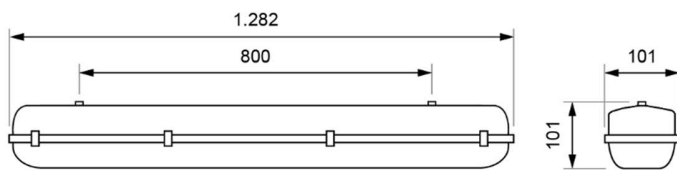

DATA SHEET. Model: LN1-2400P2400 _ Rev. 01 (March 2024)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

