

## DATA SHEET. Model: LN2-900P4800.

Self-contained emergency light fitting with maintained functioning of the LN Series.




### Description

Watertight self-contained emergency light fitting for surface mounting.  
Illumination through LED strip with internal high transmittance soft opal diffuser.  
Rectangular and modern design, slim and discreet with soft opal external diffuser.

### Technical characteristics

|                        |   |
|------------------------|---|
| Lamp in emergency      | 96 x LED White 5,700 K  |
| Lamp in maintained     | 96 x LED White 5,700 K  |
| Flux in emergency      | 900 lm  |
| Flux in maintained     | 4.800 lm  |
| Charge indicator       | 1 x LED green   |
| Autonomy               | 2 h   |
| Supply voltage         | 230 Vac - 50 Hz   |
| Operation temperature  | 0 ÷ 40°C  |
| Mains power            | 35.0 W  |
| Battery                | Ni-Cd (HT) 14.4 V – 1.5 Ah  |
| Remote controllable    | Yes (TL-300)  |
| Protection rating      | IP65 - IK08   |
| Electrical insulation  | Class I   |
| Applicable legislation | CE marking (93/68/CEE):<br>2014/35/EU<br>2014/30/EU<br>2011/65/EU |

### Photometric curve

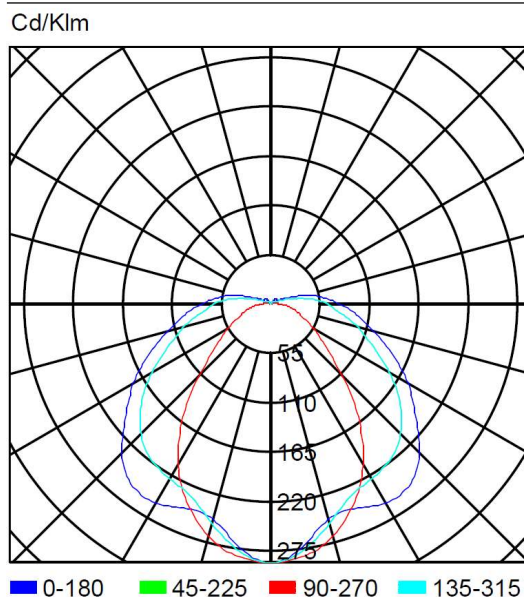

DATA SHEET. Model: LN2-900P4800 \_ Rev. 01 (March 2024)




**LUZNOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com



## Dimensions

Surface mounting – Size 2

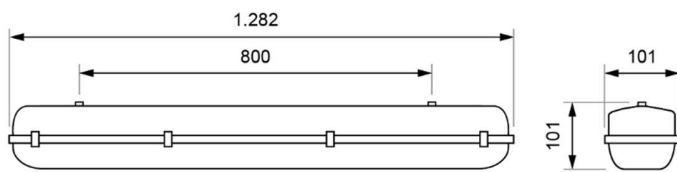

DATA SHEET. Model: LN2-900P4800 \_ Rev. 01 (March 2024)



**LUZNOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

