
DATA SHEET. Model: LN-1200L1.

Centralizable fittings (without emergency lighting) of the LN Series.



Description

Watertight centralizable fitting for surface mounting.
Illumination through LED strip with internal high transmittance soft opal diffuser.
Rectangular and modern design, Slim and discreet with soft opal external diffuser.

Technical characteristics


Lamp in emergency	N/A
Lamp in maintained	24 x LED White 5,700 K
Flux in emergency	N/A
Flux in maintained	1.200 lm
Charge indicator	N/A
Autonomy	N/A
Supply voltage	From 85 to 265 Vac - 50 Hz From 120 to 370 Vdc
Operation temperature	0 ÷ 40°C
Mains power	10.5 W
Remote controllable	N/A
Protection rating	IP65 - IK08
Electrical insulation	Class I
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Photometric curve

No

Dimensions

Surface mounting – Size 1

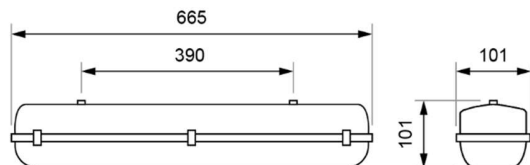

DATA SHEET. Model: LN-1200L1 _ Rev. 01 (marzo 2024)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

