
DATA SHEET. Model: LN-4800L2.

Centralizable fittings (without emergency lighting) of the LN Series.



Description

Watertight centralizable fitting for surface mounting.
Illumination through LED strip with internal high transmittance soft opal diffuser.
Rectangular and modern design, Slim and discreet with soft opal external diffuser.

Technical characteristics

Photometric curve

Lamp in emergency	N/A	No
Lamp in maintained	96 x LED White 5,700 K	
Flux in emergency	N/A	
Flux in maintained	4.800 lm	
Charge indicator	N/A	
Autonomy	N/A	
Supply voltage	From 85 to 265 Vac - 50 Hz From 120 to 370 Vdc	
Operation temperature	0 ÷ 40°C	
Mains power	33.0 W	
Remote controllable	N/A	
Protection rating	IP65 - IK08	
Electrical insulation	Class I	
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU	

DATA SHEET. Model: LN-4800L2 _ Rev. 01 (March 2024)




LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

Surface mounting – Size 2

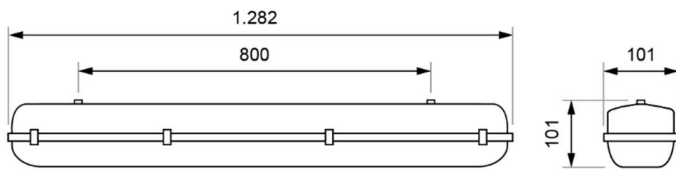

DATA SHEET. Model: LN-4800L2 _ Rev. 01 (March 2024)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

