



# LN Series AUTOTEST

Waterproof LED emergency fitting with Autotest function: a microprocessor checks the status of the emergency LEDs, the battery and the electronics on a regular basis. Modern design and LED strip lighting (colour temperature: 5,700 K) with soft opal internal diffuser in high transmittance material. Remote controllable.



## Non maintained

model	Φ (lm)	A (h)	size	P net (W)	RRP (€)
LNA1-450	450	1	1	1.5	169.86
LNA1-1200	1,200	1	1	3.0	197.44
LNA1-2400	2,400	1	2	4.5	274.66
LNA1-4800	4,800	1	2	6.5	355.19
LNA2-600	600	2	1	3.0	189.72
LNA2-1200	1,200	2	2	4.5	260.32
LNA2-2400	2,400	2	2	6.5	340.85

## Maintained

model	Φ (lm) emerg	Φ (lm) main	A (h)	size	P net (W)	RRP (€)
LNA1-450P1200	450	1,200	1	1	11.0	215.08
LNA1-1200P1200	1,200	1,200	1	1	14.0	234.94
LNA1-900P2400	900	2,400	1	2	22.0	294.52
LNA1-2400P2400	2,400	2,400	1	2	24.0	334.22
LNA1-1800P4800	1,800	4,800	1	2	35.0	386.07
LNA2-600P1200	600	1,200	2	1	14.0	234.94
LNA2-450P2400	450	2,400	2	2	22.0	294.52
LNA2-1200P2400	1,200	2,400	2	2	24.0	334.22
LNA2-900P4800	900	4,800	2	2	35.0	386.07


◇ Protection rating: IP65.

◇ Ni-Cd (HT) battery.

◇ Information about Autotest on page 93.

## Surface mounting

Size 1

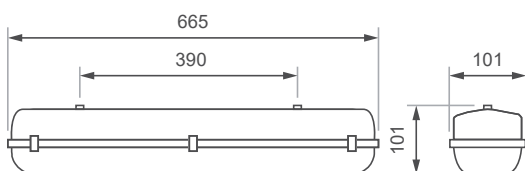

Size 2

