

## DATA SHEET. Model: LTL-450P.

Self-contained emergency lighting fitting with maintained functioning of the Tube Series.



### Description


Self-contained watertight emergency lighting fitting to be surface mounted. Illumination by LED-strip with internal and external transparent diffusers. Cylindrical design with the possibility of rotation in its two lateral supports. Supplied with a PG-11 cable gland for cable entry from the side.

### Technical characteristics

Lamp in emergency	9 x LED White 5,700 K
Lampara in maintained	9 x LED White 5,700 K
Flux in emergency	450 lm
Flux in maintained	450 lm
LED charge indicator	1 x LED green
Autonomy	1 h
Power supply voltage	230 Vac - 50 Hz
Operation temperature	0 ÷ 40°C
Mains power	7.5 W
Battery	Ni-Cd (HT) 3.6 V – 1.5 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP67 - IK07
Electrical insulation	Class I
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

### Photometric curve


Cd/Klm

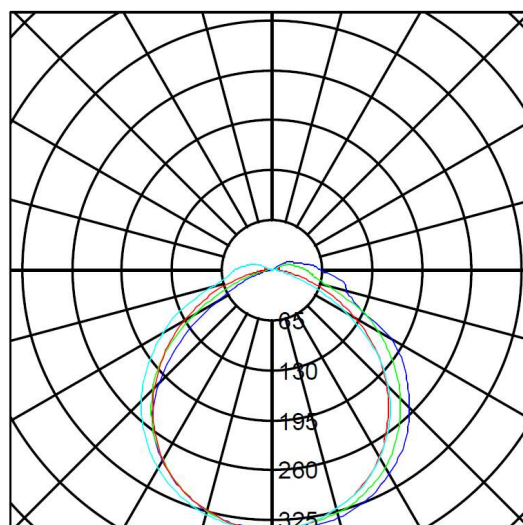

■ 0-180 ■ 45-225 ■ 90-270 ■ 135-315

### Dimensions

Surface mounting

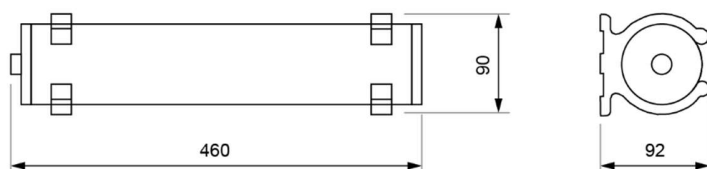

DATA SHEET. Model: LTL-450P \_ Rev. 01 (March 2024)



LUZNOR Desarrollos Electrónicos, S.L.  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

