
DATA SHEET. Model: PL1-1200E.

Self-contained emergency floodlight with non-maintained functioning of the PL Series.



Description

Emergency floodlight for surface mounting.

It does not include a hinged metal body, but a system of steel plates with RAL 7035 gray epoxy paint that allows the orientation of the spotlight.


A single LED spotlight with dispersed light beam and soft opal diffuser as standard (watertight housing), ideal for homogeneous illumination from great heights.

Technical characteristics

Lamp in emergency	1 x 24 x LED White
Lamp in maintained	N/A
Flux in emergency	1.200 lm
Flux in maintained	N/A
Colour temperature	5,700 K
Charge indicator	1 x LED green
Autonomy	1 h
Supply voltage	230 Vac - 50 Hz
Operation temperature	0 ÷ 40°C
Mains power	3.0 W
Battery	Li-Ion 3.6 V – 5.2 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP67 - IK08
Electrical insulation	Class II
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Photometric curve

Cd/Klm

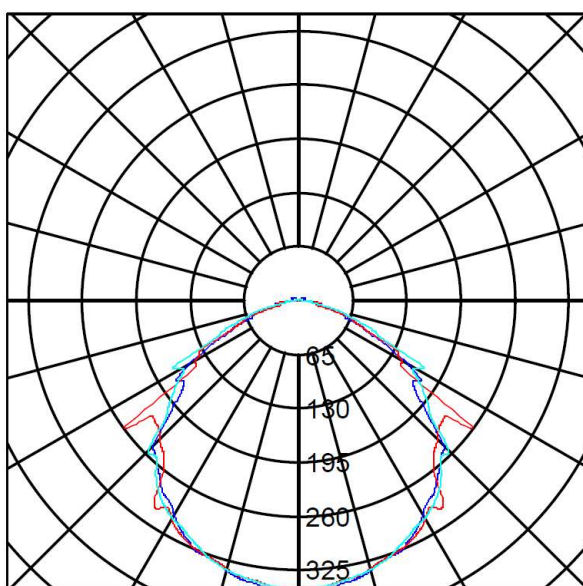

■ 0-180 ■ 45-225 ■ 90-270 ■ 135-315

DATA SHEET. Model: PL1-1200E _ Rev. 01 (March 2024)




LUZNOR Desarrollos Electrónicos, S.L.

Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

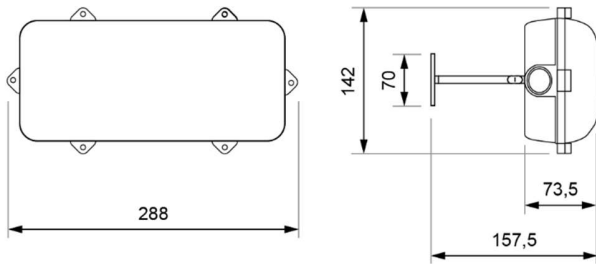

DATA SHEET. Model: PL1-1200E _ Rev. 01 (March 2024)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

