

DATA SHEET. Model: PH1-1000PE.

Self-contained emergency floodlight with maintained functioning of the PH Series.



Description

Emergency floodlight for surface mounting.

Small metal body with epoxy paint RAL 7035 grey: watertight wall cabinet with lockable door.

Two fully adjustable LED spotlights with a concentrated light beam, suitable for great heights.


Supplied with a PG-11 cable gland for cable entry from the side.

Technical characteristics

Lamp in emergency	2 x LED White 5,000 K
Lamp in maintained	2 x LED White 5,000 K
Flux in emergency	1.000 lm
Flux in maintained	1.000 lm
Charge indicator	1 x LED green
Autonomy	1 h
Supply voltage	230 Vac - 50 Hz
Operation temperature	0 ÷ 40°C
Mains power	13.0 W
Battery	Ni-Cd (HT) 7.2 V – 1.5 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP66 - IK08
Electrical insulation	Class I
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Curva fotométrica

Cd/Klm

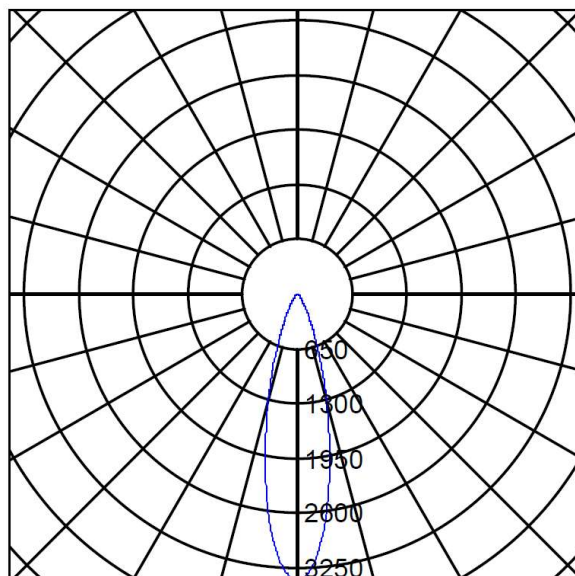

■ 0-180

DATA SHEET. Model: PH1-1000PE _ Rev. 01 (March 2024)



LUZNOR Desarrollos Electrónicos, S.L.


Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961

NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

Surface mounting

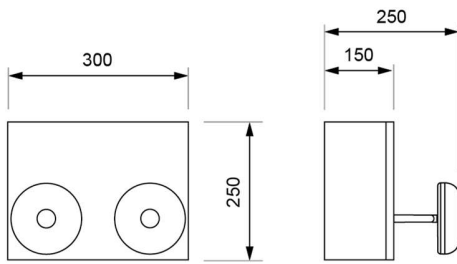

DATA SHEET. Model: PH1-1000PE _ Rev. 01 (March 2024)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

