
DATA SHEET. Model: LRX-2.

Rechargeable LED ATEX torch of the LRX Series



ATEX
Ex II 1 GD



Description

Rechargeable LED ATEX torch, watertight and highly durable to be used in explosive atmospheres zones 0 1 and 2 (gas), as well as 20, 21 and 22 (dust).

It features an electronic circuit with microprocessor that allows programmable functions.

Front and/or rear signalling.

Technical characteristics

Colour temperature	White 5.000 K
Usage temperature	From -10°C to 40°C
Electrical insulation	Class III
Weight	1.350 g
Protection rating	IP67 – IK08
Battery	Ni-MH (HT) 4,8 V – 4 Ah
	Chargers C-64 series
Without signalling	1 push button
With signalling	2 push buttons
Housing material	Technical polymers
Housing colour	Black
Light beam	50% at ±4,1° 10% at ±6,9°
Charging status control	Red 0% – 20% Amber 20% – 60% Green 60% – 100% Green flash >100%
Light orientation	Mobile support
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Light characteristics

Power	Low	Nominal	High
Light flux	115 lm	222 lm	338 lm
Autonomy	16 h	8 h	5 h
Range	129 m	179 m	221 m
Intensity	4.175 cd	8.059 cd	12.270 cd

Functions

The standard programming includes 3 light power modes and 3 flashing modes.

Automatic switch-off when placing the torch on the charger.

Automatic switch-on during 3 minutes in case of failure of mains supply to the charger.

ATEX certification

2014/34/EU:
Ex II 1 GD
Ex ia IIC T4 Ga
Ex ia IIIC T85°C Da
-40°C ≤ Ta ≤ +40°C
LOM 15ATEX2183
CE 0163


DATA SHEET. Model: LRX-2 _ Rev. 00 (enero 2021)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

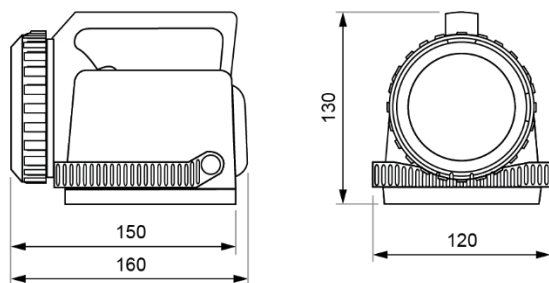

DATA SHEET. Model: LRX-1 _ Rev. 00 (enero 2021)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

