
DATA SHEET. Model: C-CORQ.

Individual chargers for torches of the QR, LR, HR, LRX and HRX Series.



Description

Individual charger to optimally charge the different battery technologies corresponding to the torches of the QR, LR, HR, LRX and HRX Series.

Fast charging by means of two flying contact leads that provide steadily current without electrical hazard. Design that maximizes the ease of user, resistant and in accordance with the aesthetics of the torches.

Mounting of the charger on any surface by means of four screws and fixing of the torch on the charger through an additional part for mechanical fastening.

Technical characteristics

Power supply	From 85 to 265 VAC –50 Hz	12 VDC
Plug type	European (C, E, F)	Cigarette-lighter
Usage temperature	From -10°C to 40°C	
Electrical insulation	Class II	
Weight	750 g	
Protection rating	IP40 – IK08	
Power input VAC	fast	8 W
	maintenance	4 W
Power input VDC	fast	6 W
	maintenance	1,5 W
Nominal current	fast	500 mA
	maintenance	100 mA
Charging control	LED tricolor	
Housing material	Black technical polymer	
Normativa aplicable	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU	

Charging times

Ni-Cd or Ni-MH 1,6 or 2 Ah battery	5 h
Ni-Cd or Ni-MH 4 Ah battery	8 h
Li-Ion 2,6 Ah battery	5 h
Li-Ion 5,2 Ah battery	9 h

Charging signalling

Green	Connected to the mains
Amber	Torch is charging fast
Red	Maintenance charging of the torch

DATA SHEET. Model: C-CORQ _ Rev. 00 (enero 2021)




LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

Standard mounting

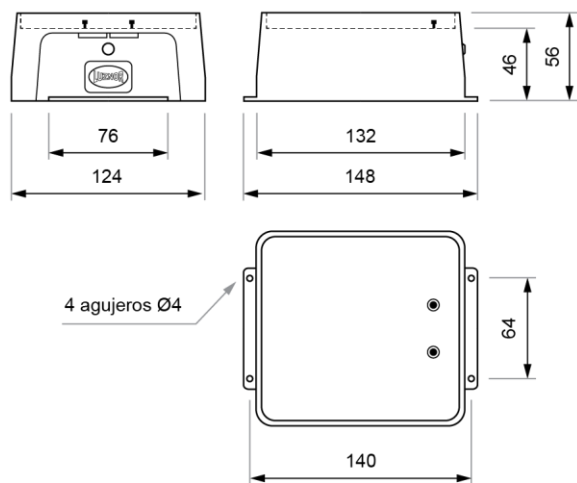

Mounting with mechanical fastening

