



DATA SHEET. Model: PL1-1800PE.

Self-contained emergency floodlight with maintained functioning of the PL Series.



Description

Emergency floodlight for surface mounting.

Watertight metallic housing with epoxy paint in grey colour RAL 7035: wall cabinet with lockable door.


Four LED spotlights with dispersed light beam and soft opal diffuser as standard (watertight housing), ideal for homogeneous from great height.

Technical characteristics

Lamp in emergency	4 x 9 x LED White
Lamp in maintained	4 x 9 x LED White
Flux in emergency	1.800 lm
Flux in maintained	1.800 lm
Colour temperature	5,700 K
Charge indicator	4 x LED green
Autonomy	1 h
Supply voltage	230 Vac - 50 Hz
Battery	4 x Ni-Cd (HT) 3.6 V 1.5 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP67 - IK08
Electrical insulation	Class I
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Photometric curve

Cd/Klm

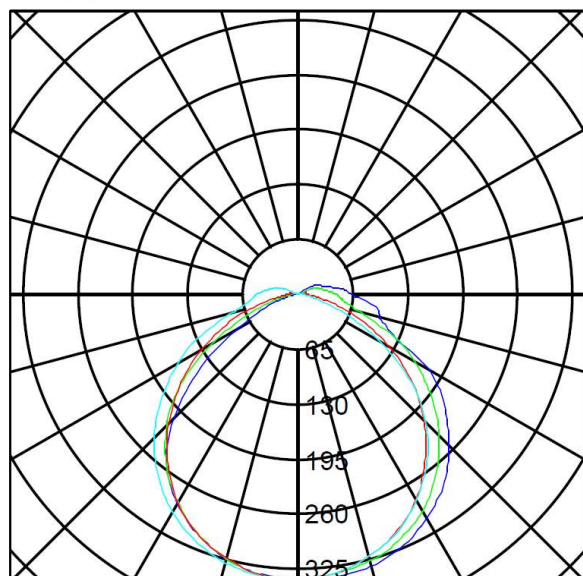

■ 0-180 ■ 45-225 ■ 90-270 ■ 135-315

DATA SHEET. Model: PL1-1800PE _ Rev. 00 (enero 2021)




LUZNOR Desarrollos Electrónicos, S.L.

Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961

NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

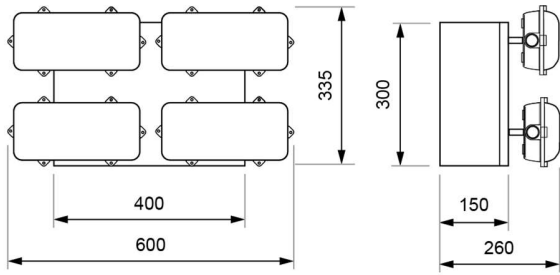

DATA SHEET. Model: PL1-1800PE _ Rev. 00 (enero 2021)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

