

---

**DATA SHEET. Model: FIL-250B.**

---

Self-contained emergency luminaire with maintained functioning of the FI Led Series.



---

**Description**

---

Watertight self-contained emergency luminaire for operation in a temperature range of -40°C to 40°C.

Series consisting of a luminaire whose electronics regulates the battery temperature in any changing environment (freezing chambers, contrast between day and night, etc.) and a BE-L watertight box.

Surface mounting, flush mounting by means of a stainless steel frame or suspended through an orientation kit.

Illumination through LED strip (without internal diffuser) with standard transparent diffuser.

High quality, resistant design, including three cable entries for PG-13,5 cable glands and supplied with two plugs.

---

**Technical characteristics**


---

Lamp in emergency	5 x LED White 5,700 K
Lamp in maintained	5 x LED White 5,700 K
Flux in emergency	250 lm
Flux in maintained	250 lm
Charge indicator	1 x LED green
Autonomy	1 h
Supply voltage	230 Vac - 50 Hz
Usage temperature	From -40°C to 40°C
Battery	Ni-Cd (HT) 3.6 V – 1.5 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP67 - IK08
Electrical insulation	Class II
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

---

**Photometric curve**

---

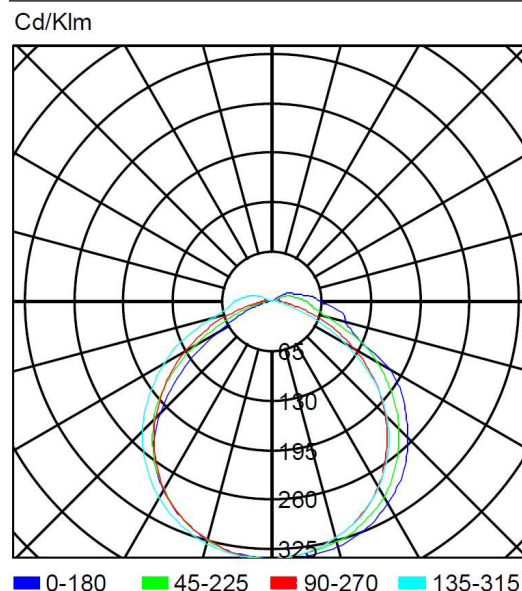

---

DATA SHEET. Model: FIL-250B \_ Rev. 00 (enero 2021)




**LUZNOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com



## Dimensions

### Watertight mounting

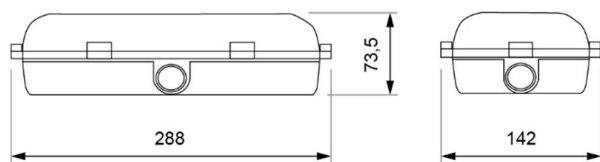

### Flush mounting (cut: 300 x 160 mm)



### Adjustable mounting



DATA SHEET. Model: FIL-250B \_ Rev. 00 (enero 2021)



**LUZ NOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

