

Polar Series

The most minimalist emergency light. Circular and flush design. Light source consisting of 6 white crown-shaped LEDs, with a choice of colour temperature: 5,700 K (cold light) or 3,000 K (warm light). Set comprising luminaire kit, kit module and battery. Remote controllable.



Non-maintained

model	Φ (lm)	A (h)	P net (W)	RRP (€)
MB-300-BT	300	1	2.0	73.41
MB-200-BT	200	1	1.5	66.86
MB-200-2-BT	200	2	2.0	69.70
MB-150-3-BT	150	3	2.0	69.70


Maintained

model	Φ (lm)	A (h)	P net (W)	RRP (€)
MB-300P-BT	300	1	6.5	86.30
MB-200P-BT	200	1	4.0	79.64
MB-200P-2-BT	200	2	4.5	82.59
MB-150P-3-BT	150	3	3.7	82.59

Centralizable luminaires

model	Φ (lm)	P net (W)	modules	power supply	RRP (€)
MB-200L-BT	200	2.5	luminaire + kit	85÷265 Vac and 120÷370 Vdc	48.13
MB-200L-BT (12Vdc)	200 or 100	2.0 or 1.0	luminaire	12 Vdc	43.31
MB-200L-BT (24Vdc)	200 or 100	2.0 or 1.0	luminaire	24 Vdc	43.31

To request different body finish and/or different diffuser type, change the corresponding letters in the reference. To request a colour temperature of 3,000 K, add "W" to the reference. To request IP55 degree of protection, add "E" to the end of the reference. Example:

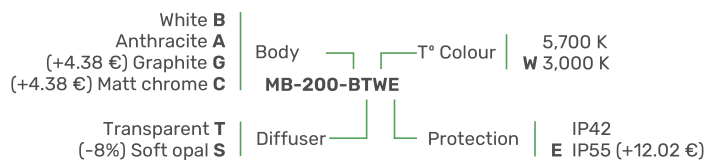

◇ Interdistances on page 84.

◇ Dimensions on page 9.

◇ Ni-Cd (HT) battery.

◇ The development of the centralizable luminaires of 300 and 150 lm is available on demand.

