

DATA SHEET. Model: DOME-T3.

Centralizable luminaire (without emergency mode) of the Dome Series.



Description

Centralizable luminaire for surface and recessed mounting in hollow surface through a recessing frame and in solid surface through a masonry box.

Illumination LED adjustable in 4 positions.


Discreet and respectful design with transparent, soft opal (-8%) or strong opal (-30%) diffuser.

Technical characteristics

Lamp in emergency	N/A
Lamp in maintained	1 x LED White 5,700 K
Flux in emergency	N/A
Flux in maintained	110 lm
Charge indicator LED	N/A
Autonomy	N/A
Supply voltage	230 Vac - 50 Hz
Mains power	2,3 W
Battery	N/A
Remote controllable	N/A
Protection rating	IP54 - IK06 (IP67 possible)
Electrical insulation	Class II
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Photometric curve


Cd/Klm

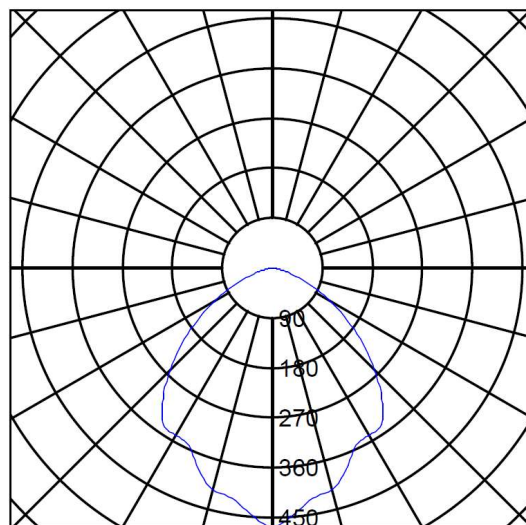


■ 0-180

Dimensions

Surface mounting

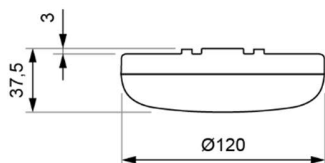

Recessed mounting hollow (cut: Ø 130 mm)

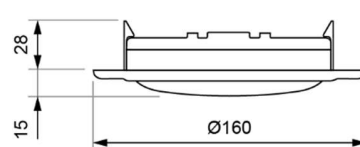


DATA SHEET. Model: DOME-T3 _ Rev. 01 (febrero 2024)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Recessed mounting solid (cut: Ø 150 mm)

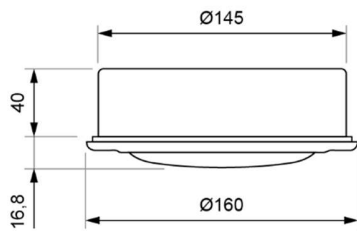

Adjustable maintained illumination

Four internal microswitches allow to choose between four levels of illumination, both in maintained and emergency mode, with their corresponding autonomies:

Position	Flux maintained
1	77.0 lm (77%)
2	44.0 lm (40%)
3	11.0 lm (10%)
4	1.1 lm (1%)

DATA SHEET. Model: DOME-T3 _ Rev. 01 (febrero 2024)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

