



Dome Series

Circular residential emergency luminaire, designed for residential, hotel and hospital environments. Illumination by means of a single LED (colour temperature: 5,700 K). Four possible levels of luminous flux, both emergency and maintained, allowing dim and pleasant ambient or night-time lighting with minimum consumption.



Maintained

model	emergency	remote	P net (W)	RRP (€)
DOME-T	yes (Ni-Cd HT)	no	3.0	71.84
DOME-T2	yes (Ni-Cd HT)	yes	3.0	79.29
DOME-T3	no	no	2.3	59.71

To request a different diffuser type, change the corresponding letter in the reference. To request an IP67 degree of protection, add "E" at the end of the reference. Example:


DOME-OE
 — Diffusor | T Transparent
 | O Opal
 — Protection | IP54
 | E IP67 (+2.79 €)

Internal connector

position	Φ (lm) main	Φ (lm) emerg	A (h)
1	77.0 (70%)	110 (100%)	1.3
2	44.0 (40%)	77 (70%)	2.0
3	11.0 (10%)	55 (50%)	3.0
4	1.1 (1%)	33 (30%)	5.0




Surface mounting

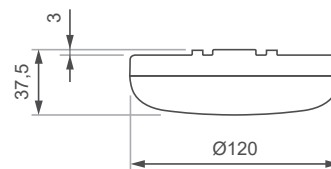

Recessed mounting


Hollow surface

Cut: Ø130 mm

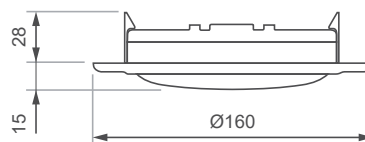

Solid surface

Cut: Ø150 mm

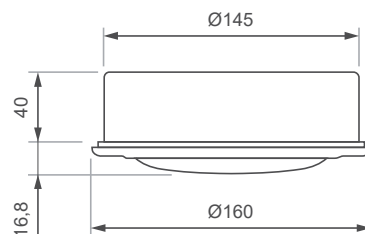

Recessing frame

White

Ref. MADOME-B
RRP. 4.84 €

Matt chrome

Ref. MADOME-C
RRP. 11.26 €

Masonry box

Ref. CEDOME
RRP. 8.23 €