



G Led Series

Design and style. LED strip lighting (colour temperature: 5,000 K) with internal diffuser. The lower part of the emergency light is illuminated by three coloured LEDs (ambient or corporative), highlighting its attractive shape. Choice of maintained or non-maintained mode. Pre-plate connection system. Remote controllable.




Maintained / Non-maintained

| model | Φ (lm) | A (h) | P net (W) | RRP (€) |
|---------------|--------|-------|-----------|---------|
| GL-110P-TTB | 118 | 1 | 4.7 / 3.4 | 69.30 |
| GL-230P-TTB | 235 | 1 | 5.9 / 3.4 | 74.04 |
| GL-350P-TTB | 353 | 1 | 6.7 / 3.4 | 82.74 |
| GL-470P-TTB | 470 | 1 | 7.9 / 3.4 | 94.94 |
| GL-580P-TTB | 588 | 1 | 8.6 / 3.4 | 106.92 |
| GL-110P-2-TTB | 118 | 2 | 4.7 / 3.4 | 78.00 |
| GL-170P-2-TTB | 176 | 2 | 5.9 / 3.4 | 86.86 |
| GL-230P-2-TTB | 235 | 2 | 5.9 / 3.4 | 94.44 |
| GL-290P-2-TTB | 294 | 2 | 6.7 / 3.4 | 106.69 |
| GL-70P-3-TTB | 78 | 3 | 4.7 / 3.4 | 78.00 |
| GL-110P-3-TTB | 118 | 3 | 4.7 / 3.4 | 81.01 |
| GL-150P-3-TTB | 157 | 3 | 5.9 / 3.4 | 94.44 |
| GL-190P-3-TTB | 196 | 3 | 5.9 / 3.4 | 100.45 |

To request a different internal and external diffuser type and/or different ambient LED colour, change the corresponding letters of the reference. Example:

| | | |
|--------------------|-------------------|----------------------|
| | Colour LEDs | B □ Y ■ V ■ A ■ R ■ |
| GL-110P-TTA | Internal diffuser | T Transparent |
| | External diffuser | S Soft opal (-8%) |
| | | F Strong opal (-30%) |

Surface mounting

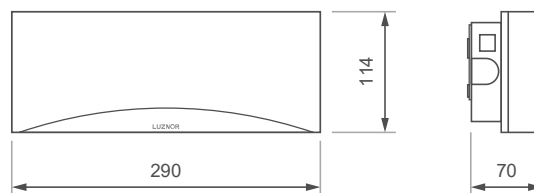

- ◇ Internal diffuser: allows for optimum protection of the LEDs and homogeneous illumination.
- ◇ Protection rating: IP44.
- ◇ Ni-Cd (HT) battery.
- ◇ Accessories y signalling on page 26.
- ◇ Pre-plate connection system: guides the wiring and allows the electrical connection without the need to open or manipulate the emergency luminaire, which is simply fitted by snapping it onto the pre-plate previously installed.

