



G Basic Led Series

Design and style in a simplified version. Illumination by LED strip (colour temperature: 5,700 K) without internal diffuser. Possibility of adding three coloured LEDs (ambient or corporative) that light up the lower part of the emergency luminaire, highlighting its attractive shape. Pre-plate connection system. Remote controllable.



Non-maintained

model	Φ (lm)	A (h)	P net (W)	RRP (€)
GL-100-T	100	1	1.4	40.91
GL-150-T	150	1	1.4	43.20
GL-200-T	200	1	1.4	45.46
GL-250-T	250	1	2.7	47.75
GL-300-T	300	1	2.7	50.01
GL-350-T	350	1	2.7	52.29
GL-400-T	400	1	2.7	54.56
GL-450-T	450	1	2.7	56.82
GL-100-2-T	100	2	1.4	45.46
GL-150-2-T	150	2	2.7	50.01
GL-200-2-T	200	2	2.7	54.56
GL-250-2-T	250	2	2.7	59.11
GL-100-3-T	100	3	2.7	50.01
GL-150-3-T	150	3	2.7	56.82

Maintained

model	Φ (lm)	A (h)	P net (W)	RRP (€)
GL-100B-T	100	1	2.7	54.56
GL-150B-T	150	1	3.2	56.82
GL-200B-T	200	1	3.7	59.11
GL-250B-T	250	1	5.7	61.37
GL-300B-T	300	1	6.2	63.64
GL-350B-T	350	1	6.6	65.92
GL-400B-T	400	1	7.1	68.19
GL-450B-T	450	1	7.6	70.46
GL-100B-2-T	100	2	2.7	59.11
GL-150B-2-T	150	2	4.5	63.64
GL-200B-2-T	200	2	5.0	68.19
GL-250B-2-T	250	2	5.7	72.75
GL-100B-3-T	100	3	3.9	63.64
GL-150B-3-T	150	3	4.5	70.46

To request a different diffuser type, change the corresponding letter of the reference. To request the incorporation of the three ambient LEDs, add the corresponding letter to the reference. Example:


GL-300-TV

Colour LEDs | **B** □ **Y** □ **V** □ **A** □ **R** □ (+5.09 €)

Diffuser | **T** Transparent
S Soft opal (-8%)
F Strong opal (-30%)

- ◇ Protection rating: IP44.
- ◇ Ni-Cd (HT) battery.
- ◇ Accessories and signalling on page 26.

Surface mounting

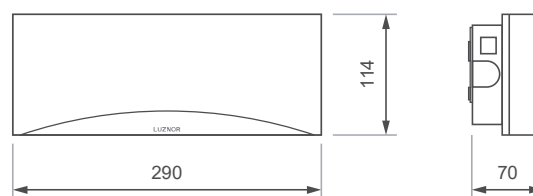

- ◇ Pre-plate connection system: guides the wiring and allows the electrical connection without the need to open or manipulate the emergency luminaire, which is simply fitted by snapping it onto the pre-plate previously installed.

