



# G Basic Led Series AUTOTEST

Design and style with Autotest function: a microprocessor checks the status of the emergency LEDs, battery and electronics on a regular basis. Illumination by LED strip (colour temperature: 5,700 K) without internal diffuser. Possibility of adding three coloured LEDs (ambient or corporative) in the lower part. Remote controllable.



## Non-maintained

model	Φ (lm)	A (h)	P net (W)	RRP (€)
GLA-100-T	100	1	1.4	69.29
GLA-150-T	150	1	1.4	71.58
GLA-200-T	200	1	1.4	73.85
GLA-250-T	250	1	2.7	76.11
GLA-300-T	300	1	2.7	78.40
GLA-350-T	350	1	2.7	80.66
GLA-400-T	400	1	2.7	82.94
GLA-450-T	450	1	2.7	85.21
GLA-100-2-T	100	2	1.4	73.85
GLA-150-2-T	150	2	2.7	78.40
GLA-200-2-T	200	2	2.7	82.94
GLA-250-2-T	250	2	2.7	87.48
GLA-100-3-T	100	3	2.7	78.40
GLA-150-3-T	150	3	2.7	85.21

## Maintained

model	Φ (lm)	A (h)	P net (W)	RRP (€)
GLA-100B-T	100	1	2.7	82.94
GLA-150B-T	150	1	3.2	85.21
GLA-200B-T	200	1	3.7	87.48
GLA-250B-T	250	1	5.7	89.76
GLA-300B-T	300	1	6.2	92.02
GLA-350B-T	350	1	6.6	94.30
GLA-400B-T	400	1	7.1	96.57
GLA-450B-T	450	1	7.6	98.84
GLA-100B-2-T	100	2	2.7	87.48
GLA-150B-2-T	150	2	4.5	92.02
GLA-200B-2-T	200	2	5.0	96.57
GLA-250B-2-T	250	2	5.7	101.12
GLA-100B-3-T	100	3	3.9	92.02
GLA-150B-3-T	150	3	4.5	98.84

To request a different diffuser type, change the corresponding letter in the reference. To request the incorporation of three coloured LEDs, add the corresponding letter of the reference. Example:


GLA-300-FB

Colour LEDs | B □ Y □ V □ A □ R □ (+5,09 €)

Diffuser | T Transparent  
S Soft opal (-8%)  
F Strong opal (-30%)

- ◇ Protection rating: IP44.
- ◇ Ni-Cd (HT) battery.
- ◇ Information about Autotest on page 85.
- ◇ Accessories and signalling on page 26.

## Surface mounting

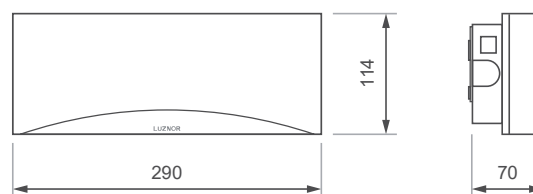

- ◇ Pre-plate connection system: guides the wiring and allows the electrical connection without the need to open or manipulate the emergency luminaire, which is simply fitted by snapping it onto the pre-plate previously installed.