




L Basic Led Series

The basic version of the L Led series. LED strip lighting (colour temperature: 5,700 K) with internal diffuser. It maintains the timeless design of the classic L series with softened edges and the same quality and resistance as always, but with improved performance and maximum energy efficiency in its more affordable version.

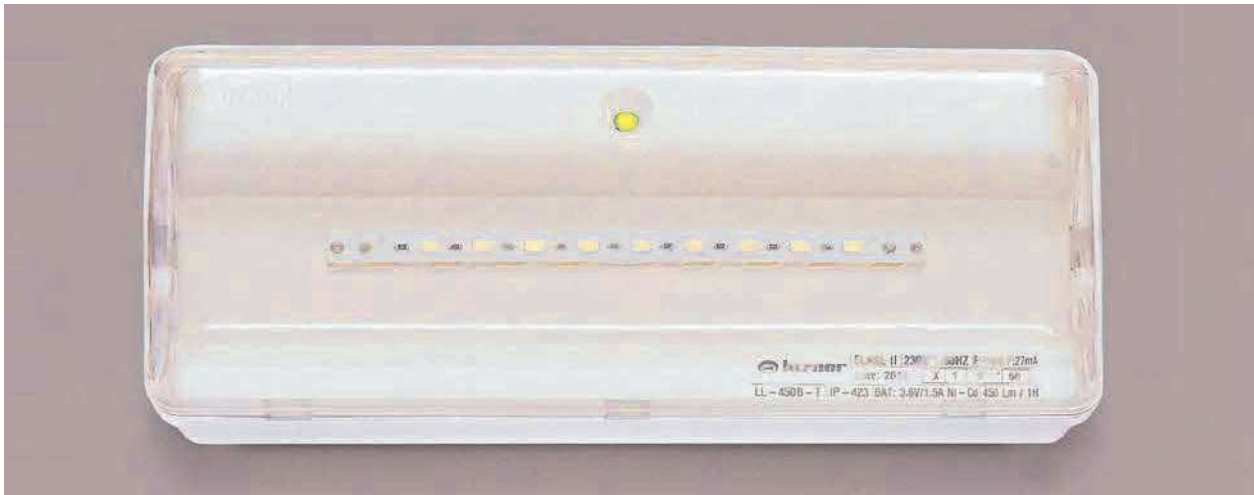

Non-maintained

model	Φ (lm)	A (h)	P net (W)	RRP (€)
LL-100-T	100	1	1.5	24.10
LL-150-T	150	1	1.5	26.84
LL-200-T	200	1	1.5	33.59
LL-250-T	250	1	2.6	37.31
LL-300-T	300	1	2.6	37.94
LL-350-T	350	1	2.6	38.53
LL-400-T	400	1	2.6	40.98
LL-450-T	450	1	2.6	41.50
LL-100-2-T	100	2	1.5	34.17
LL-150-2-T	150	2	2.6	36.57
LL-200-2-T	200	2	2.6	38.68
LL-250-2-T	250	2	2.6	39.23
LL-100-3-T	100	3	2.6	36.01
LL-150-3-T	150	3	2.6	38.12

Maintained

model	Φ (lm)	A (h)	P net (W)	RRP (€)
LL-100B-T	100	1	2.8	40.56
LL-150B-T	150	1	3.3	41.42
LL-200B-T	200	1	3.9	47.72
LL-250B-T	250	1	5.4	52.03
LL-300B-T	300	1	5.9	52.51
LL-350B-T	350	1	6.4	53.01
LL-400B-T	400	1	6.9	54.00
LL-450B-T	450	1	7.5	54.49
LL-100B-2-T	100	2	2.8	48.21
LL-150B-2-T	150	2	4.4	51.60
LL-200B-2-T	200	2	4.9	52.09
LL-250B-2-T	250	2	5.4	52.54
LL-100B-3-T	100	3	3.8	51.14
LL-150B-3-T	150	3	4.4	51.60

Centralizable luminaires

model	Φ (lm)	power supply	P net (W)	RRP (€)
LL-100L-S	100	85÷265 Vac and 120÷370 Vdc	1.3	35.32
LL-200L-S	200	85÷265 Vac and 120÷370 Vdc	2.4	38.41
LL-300L-S	300	85÷265 Vac and 120÷370 Vdc	3.3	40.72
LL-450L-S	450	85÷265 Vac and 120÷370 Vdc	4.9	45.25

To request a different diffuser type, change the corresponding letter in the reference. Example:

LL-250-2-F

Diffuser

T Transparent
S Soft opal (-8%)
F Strong opal (-30%)

Surface mounting



- ◇ Protection rating: IP42.
- ◇ Ni-Cd (HT) battery.
- ◇ Accessories and signalling on page 34.