



# Serie LLD

Basic flush-mounted LED emergency luminaire, flat aesthetics and rectangular shape with sharp edges. The LLD series is an emergency luminaire of the L Basic Led series inside an MDP flush box. Fully covering opal diffuser for a minimalist finish and homogeneous and discreet illumination. Remote controllable.



## Non-maintained

model	Φ (lm)	A (h)	P net (W)	RRP (€)
LLD-100-B0	100	1	1.5	40.60
LLD-150-B0	150	1	1.5	43.31
LLD-200-B0	200	1	1.5	50.06
LLD-250-B0	250	1	2.6	53.78
LLD-300-B0	300	1	2.6	54.43
LLD-350-B0	350	1	2.6	55.02
LLD-400-B0	400	1	2.6	57.07
LLD-450-B0	450	1	2.6	57.59
LLD-100-2-B0	100	2	1.5	50.32
LLD-150-2-B0	150	2	2.6	52.68
LLD-200-2-B0	200	2	2.6	54.78
LLD-250-2-B0	250	2	2.6	55.32
LLD-100-3-B0	100	3	2.6	52.14
LLD-150-3-B0	150	3	2.6	54.22

## Maintained

model	Φ (lm)	A (h)	P net (W)	RRP (€)
LLD-100B-B0	100	1	2.8	57.04
LLD-150B-B0	150	1	3.3	57.90
LLD-200B-B0	200	1	3.9	64.20
LLD-250B-B0	250	1	5.4	68.52
LLD-300B-B0	300	1	5.9	69.00
LLD-350B-B0	350	1	6.4	69.49
LLD-400B-B0	400	1	6.9	69.95
LLD-450B-B0	450	1	7.5	70.43
LLD-100B-2-B0	100	2	2.8	64.22
LLD-150B-2-B0	150	2	4.4	67.59
LLD-200B-2-B0	200	2	4.9	68.07
LLD-250B-2-B0	250	2	5.4	68.52
LLD-100B-3-B0	100	3	3.8	67.13
LLD-150B-3-B0	150	3	4.4	67.59

## Centralizable luminaires

model	Φ (lm)	power supply	RRP (€)
LLD-100L-B0	100	85÷265 Vac and 120÷370 Vdc	51.47
LLD-200L-B0	200	85÷265 Vac and 120÷370 Vdc	54.53
LLD-300L-B0	300	85÷265 Vac and 120÷370 Vdc	56.79
LLD-450L-B0	450	85÷265 Vac and 120÷370 Vdc	61.30

To request different finish of the flush box frame, change the corresponding letter in the reference. Example:



<b>LLD-400-A0</b>	Body	<b>B</b> White
		<b>A</b> Anthracite (+1.24 €)
		<b>G</b> Graphite (+5.68 €)
		<b>C</b> Matt chrome (+5.68 €)

◇ Protection rating: IP42.

◇ Ni-Cd (HT) battery.

## Flush mounting

Cut: 300 x 127 mm

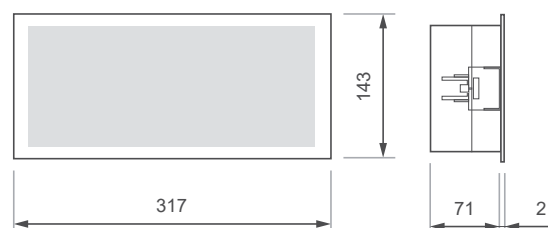

◇ Finishes, accessories and signalling on page 40.