

Serie LLE

Basic watertight LED emergency luminaire. The LLE series is an emergency of the L Basic Led series (medium power LED plate lighting) in a BE-L (IP67) watertight housing for surface installation. Transparent diffuser as standard, with the option of adding a second soft or strong opal diffuser. Remote controllable.



Non-maintained

model	Φ (lm)	A (h)	P net (W)	RRP (€)
LLE-100	100	1	1.5	51.21
LLE-150	150	1	1.5	53.95
LLE-200	200	1	1.5	60.70
LLE-250	250	1	2.6	64.42
LLE-300	300	1	2.6	65.06
LLE-350	350	1	2.6	65.64
LLE-400	400	1	2.6	68.36
LLE-450	450	1	2.6	68.88
LLE-100-2	100	2	1.5	61.54
LLE-150-2	150	2	2.6	63.94
LLE-200-2	200	2	2.6	66.05
LLE-250-2	250	2	2.6	66.61
LLE-100-3	100	3	2.6	63.39
LLE-150-3	150	3	2.6	65.50

Maintained

model	Φ (lm)	A (h)	P net (W)	RRP (€)
LLE-100B	100	1	2.8	67.67
LLE-150B	150	1	3.3	68.53
LLE-200B	200	1	3.9	74.84
LLE-250B	250	1	5.4	79.14
LLE-300B	300	1	5.9	79.62
LLE-350B	350	1	6.4	80.12
LLE-400B	400	1	6.9	81.38
LLE-450B	450	1	7.5	81.86
LLE-100B-2	100	2	2.8	75.59
LLE-150B-2	150	2	4.4	78.98
LLE-200B-2	200	2	4.9	79.46
LLE-250B-2	250	2	5.4	79.92
LLE-100B-3	100	3	3.8	78.52
LLE-150B-3	150	3	4.4	78.98

Centralizable luminaires


model	Φ (lm)	power supply	RRP (€)
LLE-100L-S	100	85÷265 Vac and 120÷370 Vdc	62.43
LLE-200L-S	200	85÷265 Vac and 120÷370 Vdc	65.52
LLE-300L-S	300	85÷265 Vac and 120÷370 Vdc	67.83
LLE-450L-S	450	85÷265 Vac and 120÷370 Vdc	72.36

To request the addition of a second soft or strong opal diffuser, add "-S" or "-F" to the reference respectively. Example:

LLE-450B-S

— Extra diffuser | **S** Soft opal (-8%)
F Strong opal (-30%)

Surface mounting

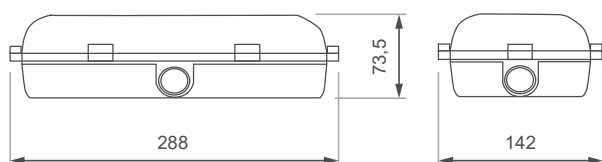

◇ Protection rating: IP67.

◇ Ni-Cd (HT) battery.

◇ Accessories on page 41.

◇ Supplied with three cable gland entries for cable glands size PG 13.5 and two plugs with sealing gaskets