

DATA SHEET. Model: LLE-150B-2.

Self-contained emergency lighting with maintained functioning of the LLE Series.



Description

Self-contained watertight emergency luminaire for surface mounting, recessed mounting through stainless steel recessing frame or suspended through orientation kit.

Serie formed by a luminaire of the L Basic series and a watertight box BE-L.

Illumination by means of LED strip (without internal diffuser) with standard transparent diffuser.


Resistant, high quality design, includes three cables entries for PG-13.5 cable glands and is supplied with two plugs.

Technical characteristics

| | |
|------------------------|---|
| Lamp in emergency | 3 x LED White 5,700 K |
| Lamp in maintained | 3 x LED White 5,700 K |
| Flux in emergency | 150 lm |
| Flux in maintained | 150 lm |
| Charge indicator | 1 x LED green |
| Autonomy | 2 h |
| Supply voltage | 230 Vac - 50 Hz |
| Operation temperature | 0 ÷ 40°C |
| Mains power | 4.4 W |
| Battery | Ni-Cd (HT) 3.6 V – 1.5 Ah |
| Remote controllable | Yes (TL-300) |
| Protection rating | IP67 - IK08 |
| Electrical insulation | Class II |
| Applicable legislation | CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU |

Photometric curve

Cd/Klm

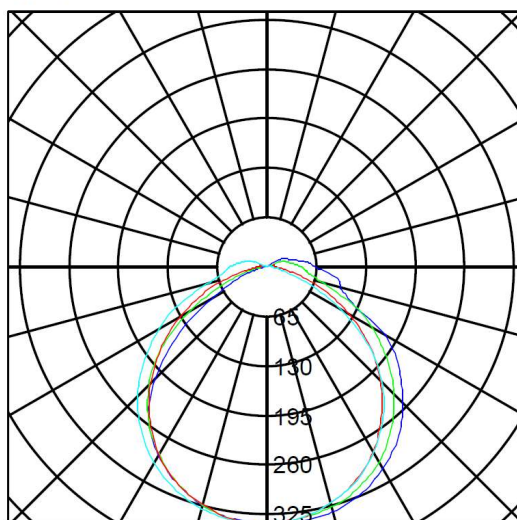

■ 0-180 ■ 45-225 ■ 90-270 ■ 135-315

DATA SHEET. Model: LLE-150B-2 _ Rev. 01 (March 2024)




LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

Watertight mounting

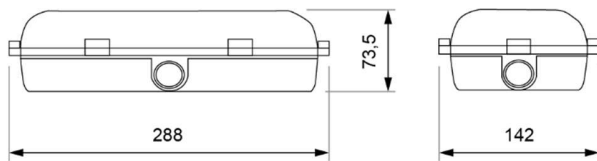

Recessed mounting (cut: 300 x 160 mm)



Swivel mounting



DATA SHEET. Model: LLE-150B-2 _ Rev. 01 (March 2024)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

