

---

**DATA SHEET. Model: LLE-100L.**

---

Centralizable luminaire (without emergency lighting) of the LLE series.



---

**Description**

---

Watertight centralizable luminaire for surface mounting, recessed mounting through stainless steel recessing frame or suspended through orientation kit.

Serie formed by a luminaire of the L Basic series and a watertight box BE-L.

Illumination by means of LED strip (without internal diffuser) with standard transparent diffuser.

Resistant, high quality design, includes three cables entries for PG-13.5 cable glands and is supplied with two plugs.

---

**Technical characteristics**

---

Lamp in emergency	N/A
Lamp in maintained	2 x LED White 5,700 K
Flux in emergency	N/A
Flux in maintained	100 lm
Charge indicator	N/A
Autonomy	N/A
Supply voltage	85 ÷ 265 Vac - 50 Hz 120 ÷ 370 Vdc
Operation temperature	0 ÷ 40°C
Mains power	1.3 W
Battery	N/A
Remote controllable	N/A
Protection rating	IP67 - IK08
Electrical insulation	Class II
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

---

**Photometric curve**

---

N/A

---

DATA SHEET. Model: LLE-100L \_ Rev. 01 (March 2024)




**LUZNOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com



## Dimensions

Watertight mounting

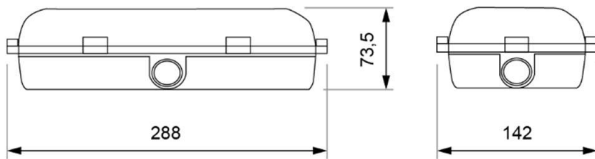

Recessed mounting (cut: 300 x 160 mm)



Swivel mounting



DATA SHEET. Model: LLE-100L \_ Rev. 01 (March 2024)



**LUZNOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

