




DATA SHEET. Model: Matiz Centralized.

Centralized beacon light with maintained and non-maintained functioning of the Matiz Series.

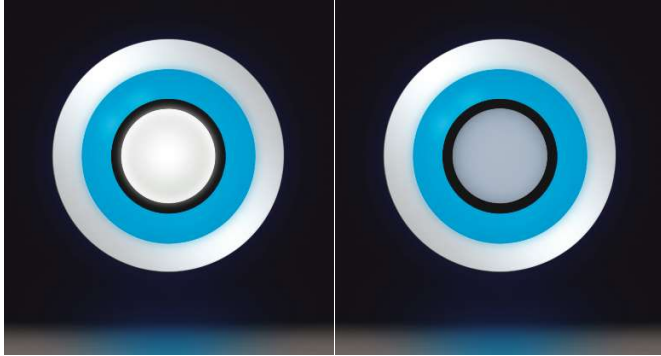

Description

Centralized circular beacon light for flush mounting on a hollow surface by means of a spring kit or on a solid surface by means of a masonry box.

Composed of a central white LED and an ambient LED crown available in different colours.

Careful design with strong opal diffuser (-30%) for maximum light homogeneity.

Technical characteristics

Electrical insulation	Class III
Mains power	0.25 W
Protection rating	IP42 or IP55, IK08
Crown colours	B <input type="checkbox"/> Y <input type="checkbox"/> V <input type="checkbox"/> A <input type="checkbox"/> R <input type="checkbox"/>
Operation temperature	0 ÷ 40°C
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU


Functions

	LED central	Crown
Non-Maint Mains	Off	On
Non-Maint Emerg	On	Off
Maint Mains	On	On
Maint Emerg	On	Off

Centralizing device

Supply voltage	230 Vac - 50 Hz
Tension beacons mains	24 Vdc
Tensión beacons emerg	12 Vdc
Autonomy	1 h
Battery	Ni-Cd (HT)

Installation scheme

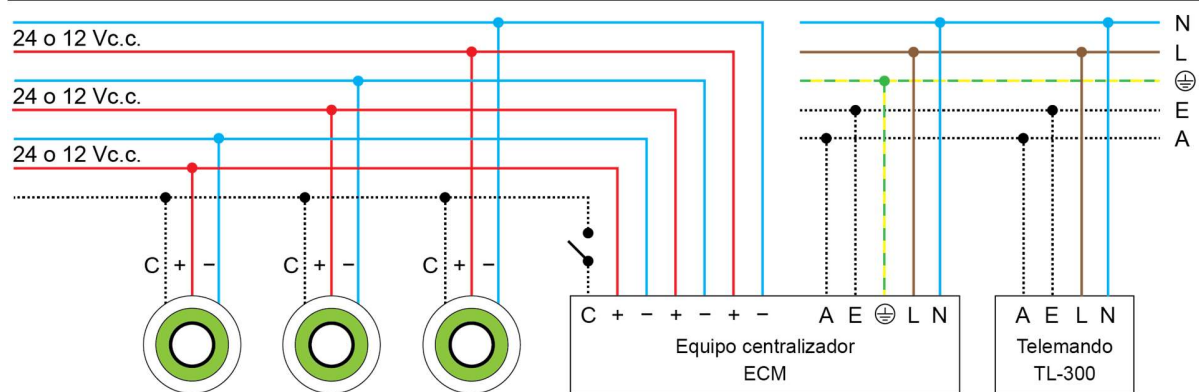

DATA SHEET. Model: Matiz Centralized _ Rev. 01 (March 2024)




LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com




Dimensions


Surface mounting

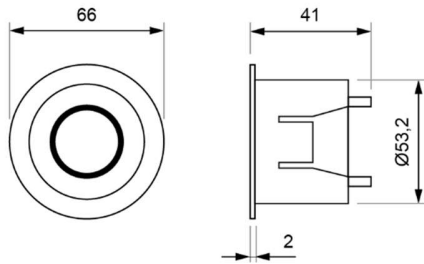

Mounting with flushing frame

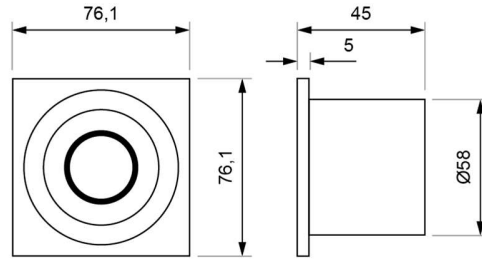

Flush mounting with masonry box

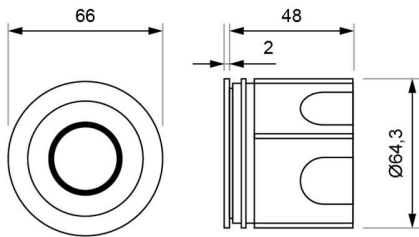

DATA SHEET. Model: Matiz Centralized _ Rev. 01 (March 2024)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

