

DATA SHEET. Model: LN1-1800P4800.

Self-contained emergency light fitting with maintained functioning of the LN Series.




Description

Watertight self-contained emergency light fitting for surface mounting.
Illumination through LED strip with internal high transmittance soft opal diffuser.
Rectangular and modern design, slim and discreet with soft opal external diffuser.

Technical characteristics

| | |
|------------------------|---|
| Lamp in emergency | 96 x LED White 5,700 K |
| Lamp in maintained | 96 x LED White 5,700 K |
| Flux in emergency | 1.800 lm |
| Flux in maintained | 4.800 lm |
| Charge indicator | 1 x LED green |
| Autonomy | 1 h |
| Supply voltage | 230 Vac - 50 Hz |
| Operation temperature | 0 ÷ 40°C |
| Mains power | 35.0 W |
| Battery | Ni-Cd (HT) 14.4 V – 1.5 Ah |
| Remote controllable | Yes (TL-300) |
| Protection rating | IP65 - IK08 |
| Electrical insulation | Class I |
| Applicable legislation | CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU |

Photometric curve

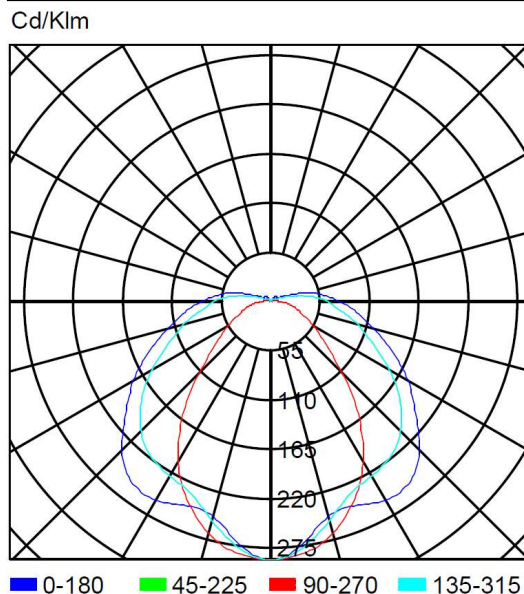

DATA SHEET. Model: LN1-1800P4800 _ Rev. 01 (March 2024)




LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

Surface mounting – Size 2

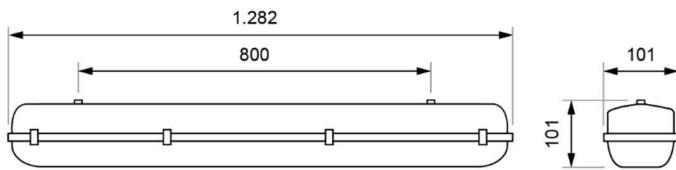

DATA SHEET. Model: LN1-1800P4800 _ Rev. 01 (March 2024)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

