

## DATA SHEET. Model: LN2-450P2400.

Self-contained emergency light fitting with maintained functioning of the LN Series.




### Description

Watertight self-contained emergency light fitting for surface mounting.  
Illumination through LED strip with internal high transmittance soft opal diffuser.  
Rectangular and modern design, slim and discreet with soft opal external diffuser.

### Technical characteristics

Lamp in emergency	48 x LED White 5,700 K
Lamp in maintained	48 x LED White 5,700 K
Flux in emergency	450 lm
Flux in maintained	2.400 lm
Charge indicator	1 x LED green
Autonomy	2 h
Supply voltage	230 Vac - 50 Hz
Operation temperature	0 ÷ 40°C
Mains power	22.0 W
Battery	Ni-Cd (HT) 7.2 V – 1.5 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP65 - IK08
Electrical insulation	Class I
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

### Photometric curve

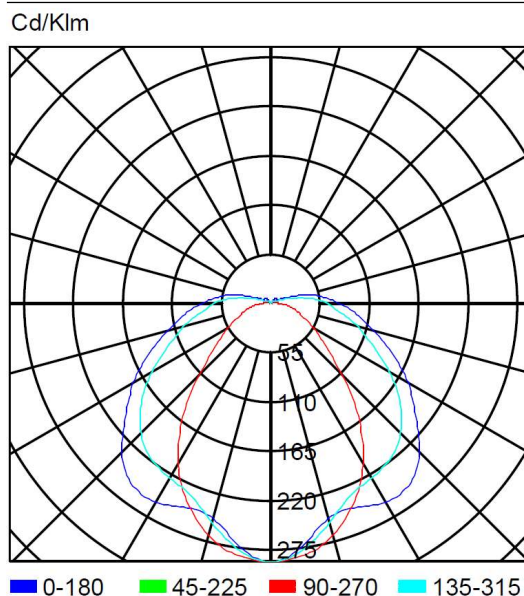

DATA SHEET. Model: LN2-450P2400 \_ Rev. 01 (March 2024)




LUZNOR Desarrollos Electrónicos, S.L.  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com



## Dimensions

---

Surface mounting – Size 2

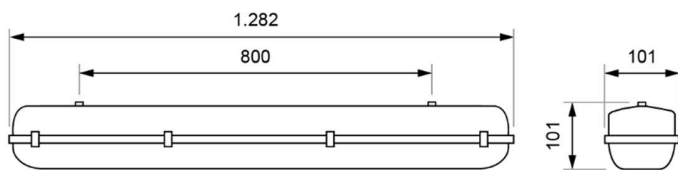

---

DATA SHEET. Model: LN2-450P2400 \_ Rev. 01 (March 2024)



**LUZ NOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

