



LN Series

Rectangular, watertight LED emergency fitting with a modern design and LED strip lighting (colour temperature: 5,700 K), for surface mounting. Includes soft opal internal diffuser in high transmittance material for optimum protection of the LEDs and homogeneous and pleasant lighting. Remote controllable.



Non maintained

model	Φ (lm)	A (h)	size	P net (W)	RRP (€)
LN1-450	450	1	1	1.5	141.20
LN1-1200	1,200	1	1	3.0	168.78
LN1-2400	2,400	1	2	4.5	245.99
LN1-4800	4,800	1	2	6.5	326.53
LN2-600	600	2	1	3.0	161.06
LN2-1200	1,200	2	2	4.5	231.66
LN2-2400	2,400	2	2	6.5	312.18

Centralizable fittings

model	Φ (lm)	size	P net (W)	RRP (€)
LN-1200L1	1,200	1	10.5	127.97
LN-2400L1	2,400	1	20.0	157.74
LN-2400L2	2,400	2	20.0	195.26
LN-4800L2	4,800	2	33.0	261.44

The supply voltage of all centralizable fittings is 85 to 265 Vac and 120 to 370 Vdc.

Maintained


model	Φ (lm) emerg	Φ (lm) main	A (h)	size	P net (W)	RRP (€)
LN1-450P1200	450	1,200	1	1	11.0	186.43
LN1-1200P1200	1,200	1,200	1	1	14.0	206.29
LN1-900P2400	900	2,400	1	2	22.0	265.85
LN1-2400P2400	2,400	2,400	1	2	24.0	305.57
LN1-1800P4800	1,800	4,800	1	2	35.0	357.41
LN2-600P1200	600	1,200	2	1	14.0	206.29
LN2-450P2400	450	2,400	2	2	22.0	265.85
LN2-1200P2400	1,200	2,400	2	2	24.0	305.57
LN2-900P4800	900	4,800	2	2	35.0	357.41

◇ Protection rating: IP65.

◇ Ni-Cd (HT) battery.

Surface mounting

Size 1

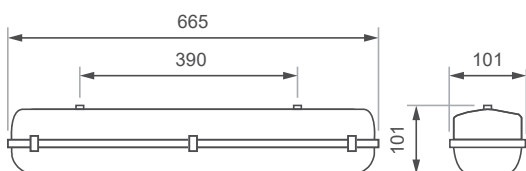

Size 2

