
DATA SHEET. Model: PL2-1800.

Self-contained emergency floodlight with non-maintained functioning of the PL Series.



Description

Emergency floodlight for surface mounting.

Hinged metal body with epoxy paint in white colour RAL 9010: the cover is supported at 90° with respect to the fixed base on the wall, allowing a comfortable handling of the interior.


Two LED spotlights with dispersed light beam and soft opal diffuser as standard, ideal for homogeneous from great height.

Technical characteristics

| | |
|------------------------|---|
| Lamp in emergency | 2 x 18 x LED White |
| Lamp in maintained | N/A |
| Flux in emergency | 1.800 lm |
| Flux in maintained | N/A |
| Colour temperature | 5,700 K |
| Charge indicator | 1 x LED green |
| Autonomy | 2 h |
| Supply voltage | 230 Vac - 50 Hz |
| Operation temperature | 0 ÷ 40°C |
| Mains power | 6.6 W |
| Battery | Ni-Cd (HT) 10.8 V - 4 Ah |
| Remote controllable | Yes (TL-300) |
| Protection rating | IP42 - IK04 |
| Electrical insulation | Class I |
| Applicable legislation | CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU |

Photometric curve

Cd/Klm

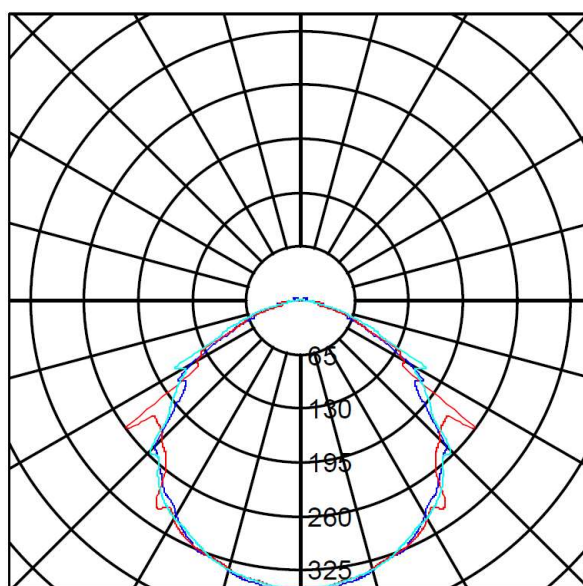

■ 0-180 ■ 45-225 ■ 90-270 ■ 135-315

DATA SHEET. Model: PL2-1800 _ Rev. 01 (March 2024)




LUZNOR Desarrollos Electrónicos, S.L.

Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

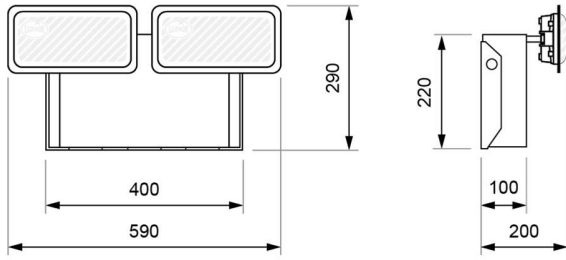

DATA SHEET. Model: PL2-1800 _ Rev. 01 (March 2024)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

