



## DATA SHEET. Model: PL1-1800E.

Self-contained emergency floodlight with non-maintained functioning of the PL Series.



### Description

Emergency floodlight for surface mounting.

Watertight metallic housing with epoxy paint in grey colour RAL 7035: wall cabinet with lockable door.


Four LED spotlights with dispersed light beam and soft opal diffuser as standard (watertight housing), ideal for homogeneous from great height.

### Technical characteristics

Lamp in emergency	4 x 9 x LED White
Lamp in maintained	N/A
Flux in emergency	1.800 lm
Flux in maintained	N/A
Colour temperature	5,700 K
Charge indicator	4 x LED green
Autonomy	1 h
Supply voltage	230 Vac - 50 Hz
Operation temperature	0 ÷ 40°C
Mains power	10,4 W
Battery	4 x Ni-Cd (HT) 3.6 V 1.5 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP67 - IK08
Electrical insulation	Class I
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

### Photometric curve

Cd/Klm

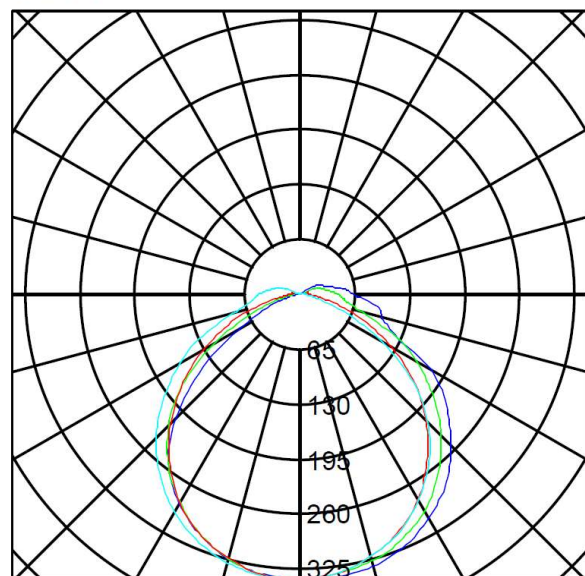

■ 0-180 ■ 45-225 ■ 90-270 ■ 135-315

DATA SHEET. Model: PL1-1800E \_ Rev. 01 (March 2024)




**LUZNOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com



## Dimensions

---

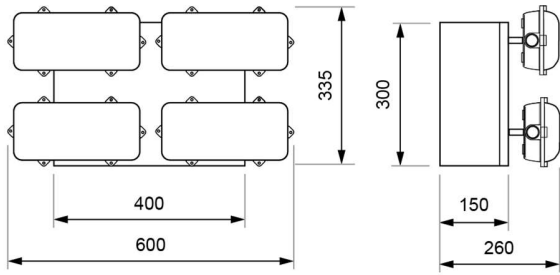

---

DATA SHEET. Model: PL1-1800E \_ Rev. 01 (March 2024)



**LUZ NOR Desarrollos Electrónicos, S.L.**  
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961  
NIF: B01266451 · luznor@luznor.com · www.luznor.com

